





## RL10 - TEMPERATURE LIMITER

- Monitoring the processes of temperature control.
- Deactivation of the control system in the case of excessive temperature, or in the case of sensor error.
- Universal input for thermocouples and resistance thermometers.
- Relay output for disconnecting the temperature control system.
- Lockout of controlled system reconnection.
- Meets the requirements of EN 60519-2 for Class 2 (Safety in electroheat installations).

### EXAMPLE OF APPLICATION

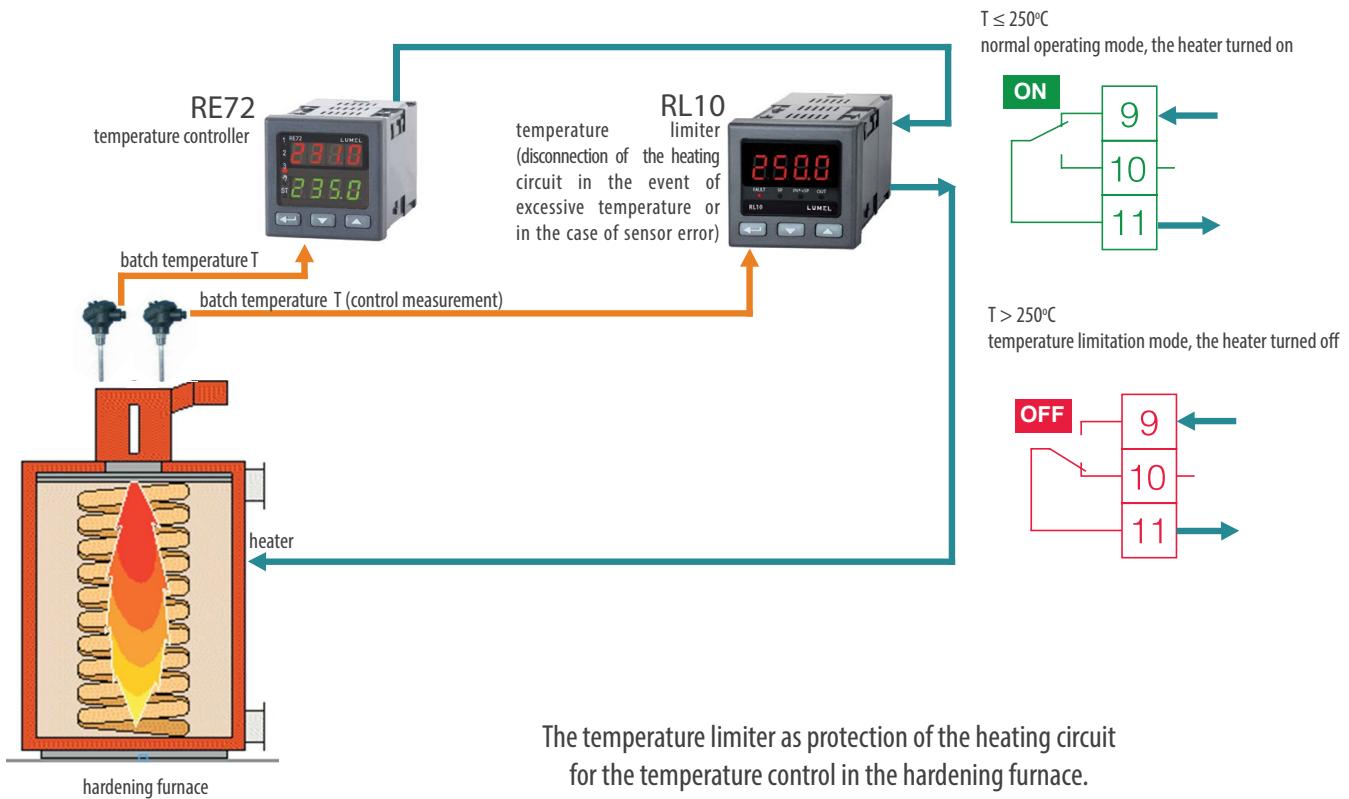


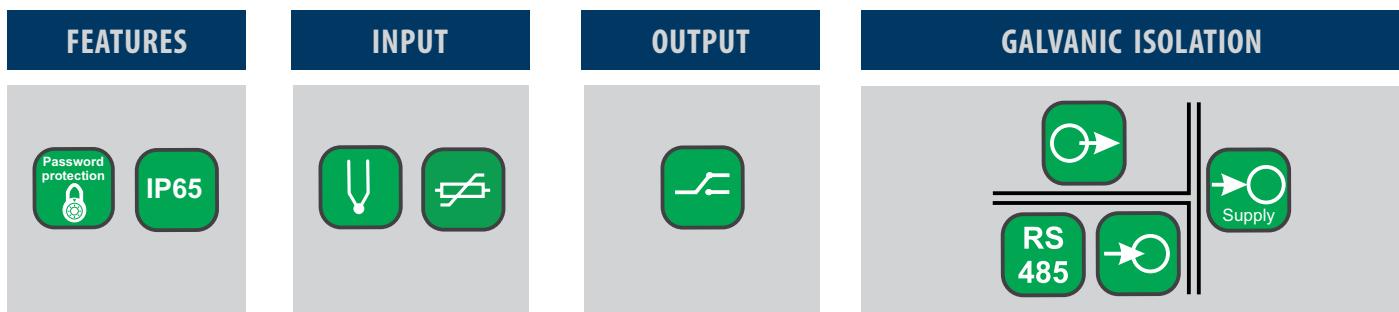


## TECHNICAL DATA

INPUT				
Input type	Symbol	Range	Error	
Pt100	Pt100	-200...850°C	-328...1563°F	0.3%
Pt1000	Pt1000	-200...850°C	-328...1563°F	0.3%
Fe-CuNi	J	-50...1200°C	-58...2192°F	0.3%
Cu-CuNi	T	-50...400°C	-58...752°F	0.3%
NiCr-NiAl	K	-50...1372°C	-58...2501.6°F	0.3%
PtRh10-Pt	S	0...1767°C	32...3212.6°F	0.5%
PtRh13-Pt	R	0...1767°C	32...3212.6°F	0.5%
PtRh30-PtRh6	B	200...1767°C	392...3212.6°F	0.5%
NiCrSi-NiSi	N	-50...1300°C	-58...2372°F	0.3%
OUTPUT				
Output type	Properties			
Relay output	changeover relay, max. load 5 A 250 V a.c. . max. 200 000 cycles for 5 A/230 V a.c. (load. resist.)			
EXTERNAL FEATURES				
Readout field	LED	9.3 mm, 4 digits		
Overall dimensions	48 ' 48 ' 93 mm			
Weight	0.25 kg			
Protection grade	from frontal side: IP65	from terminal side: IP20		
RATED OPERATING CONDITIONS				
Supply voltage	230 V a.c. +/- 10%	częstotliwość 50 .. 60 Hz		
Temperature	pracy: 0...23...50°C	magazynowania: -20...70°C		
Humidity	< 85% without condensation			
Operating position	any			
SAFETY AND COMPABILITY REQUIREMENTS				
Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2		
	noise emissions	acc. to EN 61000-6-4		
Polution level	2			
Installation category	III			
Maximal phase-to-earth voltage	for supply circuit, output: 300 V	for input circuits: 50 V		
Altitude a.s.l.	up to 2000 m			


## CONNECTION DIAGRAMS




resistance thermometer Pt100  
in a 2-wire system



resistance thermometer Pt100  
in a 3-wire system



resistance thermometer Pt1000



thermocouple

Fig.1. Connection of input signals.

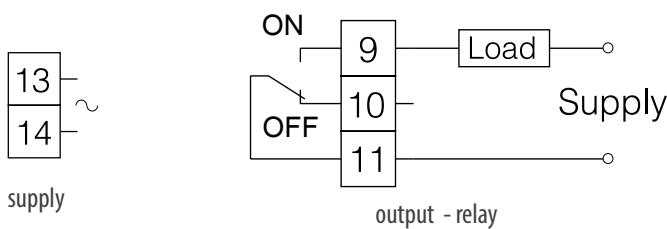


Fig.2. Connection of supply and i load circuit.




Fig.3. RS-485 interface (only for configuration).

## ORDERING CODE

Version:	RL10-	XX	X	X
standard		00		
custom-made*		XX		
Language:				
Polish		P		
English		E		
other*		X		
Acceptance tests:				
without additional quality requirements		0		
with an extra quality inspection certificate		1		
acc.to customer's request		X		

\* only after agreeing with the manufacturer

### Order example:

The code: **RL10 -00 E 0** means:

**RL10** - temperature limiter RL10

**00** - standard version

**E** - user's manual in English

**0** - without additional quality requirements.

## SEE ALSO:



**RE70** - temperature controller



**RE72** - temperature controller



**RP7** - power controller.

For more information about Lumel products  
please visit our website:

[www.lumel.com.pl](http://www.lumel.com.pl)

Join us at Facebook!



RL10\_19\_en



**LUMEL**  
EVERYTHING COUNTS

**LUMEL S.A.**

ul. Sulechowska 1, 65-022 Zielona Góra, POLAND  
tel.: +48 68 45 75 100, fax +48 68 45 75 508  
[www.lumel.com.pl](http://www.lumel.com.pl)

**Export department:**

tel.: (+48 68) 45 75 139, 45 75 233, 45 75 321, 45 75 386  
fax.: (+48 68) 32 54 091  
e-mail: [export@lumel.com.pl](mailto:export@lumel.com.pl)