

N20Z DIGITAL PANEL METER

FEATURES:


- Measurement of voltage, a.c. current or frequency,
- Three-colour LED display (5 digits, 14 mm high).
- Two alarm outputs of OC type.
- Programmable parameters through the PD14 programmer:
 - recounting of indications (individual characteristic),
 - two alarms of OC type operating in 6 working modes,
 - kind of measured signal: a.c. or a.c. + d.c. (True RMS),
 - display colour programmable in three intervals,
 - precision of displayed results (decimal point),
 - thresholds of displayed overflows,
 - highlight of the unit,
 - measurement averaging time.

INPUTS:

OUTPUTS:

GALVANIC ISOLATION:


Export department:

English: +48 68 32 95
302 / 321 / 276 / 386 / 233
German: +48 68 32 95 305
French: +48 68 32 95 304
Russian: +48 68 32 95 321
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.

ul. Sulechowska 1
65-022 Zielona Góra
POLAND

WWW.LUMEL.COM.PL

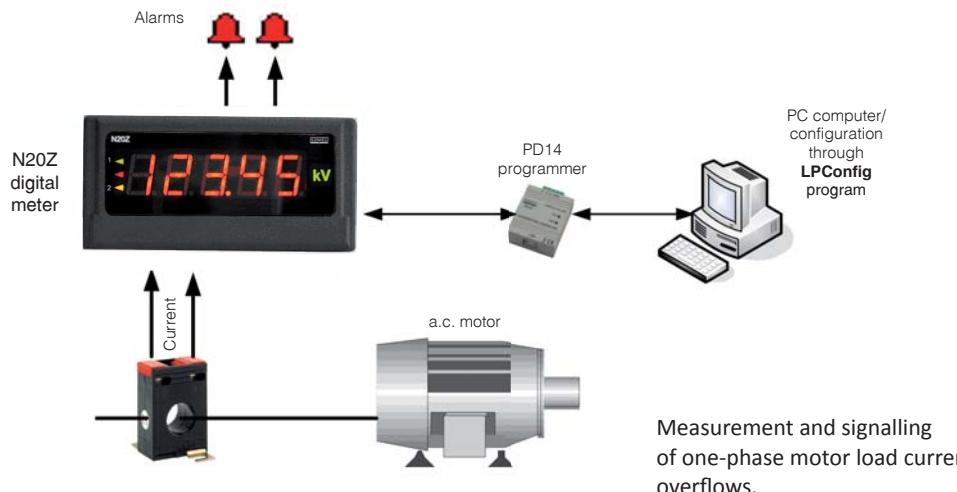EXAMPLE OF APPLICATION

INPUTS

Kind of input	Measuring range	Parameters	Basic error
Voltage input	<u>1...100...120 V</u> <u>2.5...250...300 V</u> <u>4...400...480 V</u>	Input resistance: > 2 MΩ	± (0.5% of range + 1 digit)
Current input	<u>0.01...1...1.2 A</u> <u>0.05...5...6 A</u>	Input resistance: 50 mΩ ± 10% Input resistance: 10 mΩ ± 10%	± (0.5% of range + 1 digit)
Frequency (in the range of voltages: 24...480 V)	20...500 Hz	Input resistance: > 2 MΩ	± (0.2% of range + 1 digit)

OUTPUTS

Kind of input	Features
Alarm outputs	• 2 alarm outputs of OC type

EXTERNAL FEATURES

Readout field	5 digital LED displays. Indication range -19999...99999 Digit height: 14 mm	Three-colour display (changes of colour depend on the displayed value): red, green, orange.
Weight	< 0.25 kg	
Overall dimensions	96 × 48 × 64 mm	Panel cut-out: 92 ^{+0.6} × 45 ^{+0.6} mm
Protection grade (acc. to EN 60529)	From frontal side: IP65	From terminal side: IP10

SEE ALSO:




Free LPConfig program for programming LUMEL'S products. Available on our website.



Current transformers from 5 A to 6 kA.



N14 meter for measurement of three-phase network parameters.

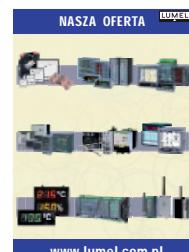

www.lumel.com.pl

For more information about LUMEL's products please visit our website: www.lumel.com.pl

RATED OPERATING CONDITIONS												
Supply	85...253 V a.c. (45...65 Hz) or d.c., 20...40 V a.c. (45...65 Hz) or d.c.						Power consumption < 6 VA					
Temperature	Ambient: -10...23...55°C						Storage: -25...85°C					
Relative humidity	< 95%						Condensation inadmissible					
Operating position	any											

SAFETY AND COMPATIBILITY REQUIREMENTS												
Electromagnetic compatibility	noise immunity						acc. to EN 61000-6-2					
	noise emissions						acc. to EN 61000-6-4					
Safety requirements							acc. to EN 61010-1					

CONNECTION DIAGRAMS												

Fig. 1 Electrical connections of the N20Z meter with the measurement of voltage and frequency.

Fig. 2 Electrical connections of the N20Z meter with the measurement of current.

ORDERING

TABLE 1. ORDERING CODES:

	N20Z -	X	X	XX	XX	X
Input:						
100 V		1				
250 V		2				
400 V		3				
1 A		4				
5 A		5				
Frequency: 20...500 Hz		6				
Supply:						
85...253 V a.c./d.c.		1				
20...40 V a.c./d.c.		2				
Unit:						
unit code number acc. to table 2			XX			
Version:						
standard			00			
custom-made*			XX			
non standard settings			99			
Aceptance tests:						
without extra requirements			8			
with an extra quality inspection certificate			7			
acc. to customer's request*			X			

* - after agreeing with the manufacturer

TABLE 2. CODES OF HIGHLIGHTED UNIT:

Code	Unit	Code	Unit	Code	Unit
00	without unit	17	µm	34	bar
01	V	18	mm	35	rad
02	A	19	cm	36	Ω
03	mV	20	m	37	kΩ
04	kV	21	km	38	%
05	MV	22	l	39	°
06	mA	23	l/s	40	turns
07	KA	24	l/h	41	rps
08	MA	25	ms	42	rpm
09	°C	26	s	43	rph
10	°F	27	h	44	m/h
11	K	28	N	45	km/h
12	Hz	29	kN	46	imp
13	kHz	30	Pa		
14	Ah	31	hPa		
15	kAh	32	kPa		
16	m/s	33	MPa	XX	on order ¹⁾

1) - after agreeing with the manufacturer

Highlight of the measured unit	ON
Kind of input	AC
Averaging time	5 s
Upper overflow of measurement	99999
Lower overflow of measurement	-19999
Individual characteristic	ON
Parameter a of the individual characteristic	0.1
Parameter b of the individual characteristic	0
Kind of the alarm output 1 operation	on
Upper value to switch the alarm 1 - Aon	40.00
Lower value to switch the alarm 1 - Aoff	0.00
Kind of the alarm output 2 operation	n-on
Upper value to switch the alarm 2 - Aon	44.00
Lower value to switch the alarm 2 - Aoff	40.00

ORDER EXAMPLES

Example 1

The code **N20Z - 3 1 01 00 8** - means: N20 meter with voltage input on 400 V, supply: 85...253 V a.c., without extra quality requirements, „V” unit

Example 2

The code **N20Z - 3 1 03 99 8 + description**

Parameter	Range/Value
Displayed colour of the upper measured value	red
Displayed colour of the median measured value	green
Displayed colour of the lower measured value	orange
Upper threshold - KpH	44.00
Lower threshold - KpL	40.00
Decimal point	000.00

- means: N20Z meter with voltage input on 400 V, supply: 85...253 V a.c., executed acc. to given detailed parameter description by the user, without extra quality requirements („mV” unit - acc. to table 2).

Export department:

English: +48 68 32 95

302 / 321 / 276 / 386 / 233

German: +48 68 32 95 305

French: +48 68 32 95 304

Russian: +48 68 32 95 321

Fax: +48 68 32 54 091

e-mail: export@lumel.pl

LUMEL S.A.

ul. Sulechowska 1

65-022 Zielona Góra

POLAND

WWW.LUMEL.COM.PL