

EM133

TOU ENERGY METER



SATEC EM133 is a Smart DIN Rail TOU Energy Meter. It is based on SATEC's best seller PM130 PLUS with an off-the-shelf LCD display (similar to the BFM136 display). The EM133 provides the full functionality of the PM130EH PLUS combined with 2 Digital Inputs, 1 Digital Output, IR (Infra Red) communication and battery backup for the real time clock. It is fully compatible with all PM130 PLUS modules.

The EM133 can serve any application from residential energy metering, through industrial energy and harmonic analysis through utility comprehensive substation automation. It provides multifunctional 3-phase power metering, revenue metering and basic power quality information. The EM133 features an internal real time clock (RTC), battery backup and onboard non-volatile memory for event and data logging. The device includes 16 set points and 4 counters that operate the built in 2 DI/ 1RO or the various analog and digital I/O add-ons.

The EM133 offers a wide range of network configurations and versatile voltage and current connections: 57 to 400V AC, up to 100A direct current measurement, connection of standard CTs (1A, 5A) and a wide range of remote CTs (split or solid cores).

Main Features

Multifunctional 3-Phase Smart Meter

- True RMS, volts, amps, power, power factor, neutral current, voltage and current unbalance, frequency
- Ampere/Volt demand meter
- 25, 50, 60 and 400 Hz measurements
- 128 samples per cycle

Billing/TOU Energy Meter

- Accuracy Class 0.5S
- Four-quadrant active and reactive energy poly-phase static meter
- Three-phase total and per phase energy measurements; active, reactive and apparent energy counters
- Time-of-Use, 4 totalization and tariff energy/demand registers x 8 tariffs, 4 seasons x 4 types of days, 8 tariff changes per day
- One-time easy programmable tariff calendar schedule
- Automatic daily energy and maximum demand profile log for total and tariff registers

Harmonic Analyzer

- Voltage and current THD, TDD and K-Factor, up to 40th order harmonic
- Voltage and current harmonic spectrum and angles

Real-time Waveform Capture (via PC)

- Real-time “scope mode” waveform monitoring capability
- Simultaneous 6-channel one-cycle waveform capture at a rate of 64 samples per cycle

Programmable Logical Controller

- Embedded programmable controller
- 16 control set points; programmable thresholds and delays
- Relay output control
- 1-cycle response time

Event and Data Recording

- Non-volatile memory for long-term event and data recording for at least 90 days history storage capabilities
- Event recorder for logging internal diagnostic events and setup changes
- Two data recorders; programmable data logs on a periodic basis; automatic daily energy and maximum demand profile log

Display

- Easy to read 2 x 16 Characters LCD display, adjustable update time
- Auto-scroll option with adjustable page exposition time; auto-return to a default page

Real-time Clock

- Backup for 60 days

Inputs/Outputs

- Built-in 2 Digital Inputs and 1 form A solid state digital output
- Optional module 4 Digital Inputs and 2 digital outputs (Solid State or Electro Mechanical)
- Optional module 4 Analog Outputs

Communications

- Standard 2-wire RS-485 communication port
- Built-in IR communication port
- Optional multipurpose RS-232/422/485 port
- Optional 10/100Base T port
- Optional PROFIBUS port
- Optional RF module (available in certain regions only)
- Optional GPRS modem

Communication protocols

- Modbus RTU
- Modbus ASCII
- DNP 3.0
- IEC 60870-5-101, -104

Meter Security

- 3 levels Password security for protecting meter setups and accumulated data from unauthorized changes

Upgradeable Firmware

- Easy upgrading device firmware through a serial or Ethernet port.

Software Support

- Includes comprehensive Power Analysis Software (PAS) for configuration and data acquisition
- Optional *eXpertpower*[™] client for communicating with the SATEC proprietary *eXpertpower*[™] Internet services

Specifications

VOLTAGE INPUTS

Voltage Connections	3 phases, 1 Neutral
Voltage Ratings	Direct voltage connection: <ul style="list-style-type: none"> ➔ 220 to 400V (L-N) ➔ 380 to 690V (L-L) ➔ Range 0-800VAC Via PT (Power Transformer): <ul style="list-style-type: none"> ➔ 57.7 to 120V (L-N) ➔ 100 to 207V (L-L) ➔ Range 0-250VAC
Starting Voltage	0.2% U_N
Input Impedance	$\geq 1M\Omega$
Burden with Aux. Power supply	$\leq 0.2VA/\text{phase}$
Overload withstand	4000 VAC (L-G) for 1 min.
Impulse Voltage	6kV
Terminal Blocks	4 Sealed, pitch 7-10mm 2.5 to 4 mm ²

CURRENT INPUTS

Current Connections	3 galvanic isolated inputs
Current Ratings	Choice of 4 options: <ul style="list-style-type: none"> ➔ ../5A CT connection ➔ ../1A CT connection ➔ Direct up to 100A ➔ Remote CT (40mA)
Starting Current	0.2% I_N
Burden per phase	$< 0.2 VA$ (../5A) $< 0.05 VA$ (../1A)
Overload (continuous)	$2 \times I_N$ ($1.2 \times I_N$ for 100A model)
Over current	$50 \times I_N$ (for 1 second)
Galvanic isolation	4000 VAC (L-G) for 1 min.
Terminal Blocks	6 Sealed, pitch 7-10mm 4 to 16 mm ²

AUXILIARY POWER SUPPLY

Rated Input	40-300 V AC/DC
Insulation Dielectric withstand	4000 VAC for 1 min.
Output power	4W
Terminal Blocks	2 Sealed, pitch 7-10mm 2.5 to 4 mm ²

BUILT IN COMMUNICATION

Communication Type	RS-485
Max. Baud Rate	115.2 kb/s
Isolation	4000 VAC (L-G) for 1 min.
Max. Cable Length	1000 m
Protocols	MODBUS RTU/ASCII DNP 3.0 IEC 60870 -5-101 (option) IEC 60870 -5-104 (option)
Terminal Blocks	3 Sealed, pitch 7-10mm 2.5 to 4 mm ²

INFRA RED COMMUNICATION

Baud rate	Up to 19.200 kb/s
Protocols	MODBUS RTU/ASCII

ADD-ON MODULES

Max. # of Modules	1
Available Modules	RS-232; PROFIBUS; ETHERNET; Digital I/O; Analog Outputs

FRONT PANEL

Display type	2x16 Characters Transflective LCD with backlight
Character size	3.2x1.85 mm
Viewing area	46x11 mm
LEDs	Total 6 LEDs: <ul style="list-style-type: none"> ➔ 1 Pulse calibration output ➔ 3 voltage indication ➔ 2 RX/TX activity
Keypad	2 buttons
Nameplate	According to IEC 60688 and IEC 62052-11

MECHANICAL

Enclosure	DIN Rail mount Complies with EN50022
Dimensions [WxHxD]	125 x 90 x 75mm
Enclosure Material	Reinforced Polycarbonate

TEMPERATURE

Operational	-25°C to 60°C
Storage	-30°C to 85°C

Standards Compliance specifications

EMC per IEC 60688 and IEC 62052-11:

Immunity:

- IEC61000-4-2: Electrostatic discharge, 15/- air/contact
- IEC61000-4-3: Electromagnetic RF Fields, 10V/m @ 80MHz – 1000MHz
- IEC61000-4-4: Fast Transients burst, 4KV on current and voltage circuits and 2 KV for auxiliary circuits
- IEC61000-4-5: Surge 4KV on current and voltage circuits and 1 KV for auxiliary circuits
- IEC61000-4-6: Conducted Radio-frequency, 10V @ 0.15MHz – 80MHz
- IEC61000-4-8: Power Frequency Magnetic Field

Emission (radiated/conducted):

- EN55022: 2010 Class A (CISPR 22)
- FCC p.15 Class A mandatory

Safety

- UL/IEC 61010-1

Insulation

- IEC 62052-11: Insulation impulse 6KV/500Ω @ 1.2/50 μs
- IEC 62053-22: AC voltage tests related to ground, 4 kV AC @ 1mn, for power and signal ports (above 40V)
- 2.5KVAC r.m.s. @ 1mn, for other ports (below 40V)

Atmospheric Environment


- Operational ambient temperature range: -25°C to +60 °C
- Long-term damp heat withstand according to IEC 68-2-3 <95% (non condensing), +40 °C
- Transport and storage temperature range: – 30°C to +85 °C
- IEC 60068-2-6: Vibration
- Frequency range: 10Hz to 150Hz
- Transition frequency: 60Hz
- Constant movement amplitude 0.075mm, f<60Hz
- Constant acceleration 9.8 m/s² (1g), f > 60Hz
- Additional Transport vibration and shocks:
- Longitudinal acceleration: 2.0 g
- Vertical acceleration: 1.2 g
- Transversal acceleration: 1.2 g
- Enclosure protection: IP20

Accuracy according to:

- IEC 62053-22, class 0.5S – active energy
- IEC 62053-21, class 0.5 – reactive energy
- IEC 60688, class 0.5S – active energy
- IEC 60688, class 1 – reactive energy

Order String

OPTIONS	
Current Inputs	
5 Ampere	5
1 Ampere	1
Direct current measurement up to 100A	100
Remote CTs: 100A, 12mm hole, solid core (set of 3)	3xCT1
Remote CTs: 100A, 23mm hole, solid core (set of 3)	3xCT1L
Remote CTs: 100A, 16mm hole, split core (set of 3)	3xCT1S
Remote CTs: 400A, 26mm hole, solid core (set of 3)	3xCT4
Remote CTs: 400A, 30.5mm hole, split core (set of 3)	3xCT4S
Remote CTs: 800A, 80x50mm hole, split core (set of 3)	3xCT8S
Remote CTs: 1200A, 180x120mm hole, split core (set of 3)	3xCT12S
Calibration at Frequency	
25 Hz	25HZ
50 Hz	50HZ
60 Hz	60HZ
400 Hz	400HZ
Resolution	
Low Resolution 1A, 1V	-
High Resolution 0.01A, 0.1V	H
Power Supply	
40-300V AC/DC	ACDC
Communication Protocol	
Modbus and DNP 3.0	-
Modbus and IEC 60870-101/104	870
Expansion Module (Max. 1 module per instrument, can be ordered separately)	
Analog Output: ±1mA	AO1
Analog Output: 0-20mA	AO2
Analog Output: 0-1mA	AO3
Analog Output: 4-20mA	AO4
Analog Output: 0-3mA	AO5
Analog Output: ±3mA	AO6
Analog Output: 0-5mA	AO7
Analog Output: ±5mA	AO8
Digital Input (Dry Contact) / Relay Output 250V / 5A AC	DIOR
Digital Input (Dry Contact) / SSR Output 250V / 0.1A AC	DIOS
Communication: Ethernet (TCP/IP)	ETH
Communication: PROFIBUS	PRO
Communication: RS232	RS232
Communication: GPRS	GPRS
Communication: RF (see note)	RF-x
RF Accessories (see note)	
Concentrator - ROW	CON-ROW
Concentrator External for 2 x ETC2002	CON-EXT
Repeater	REP
Antenna 1: without cable (module or concentrator)	AN-1
Antenna 2: with 2M cable (module or concentrator)	AN-2
Antenna 3: external for concentrator only	AN-3
Antenna 4: external for module or concentrator	AN-4

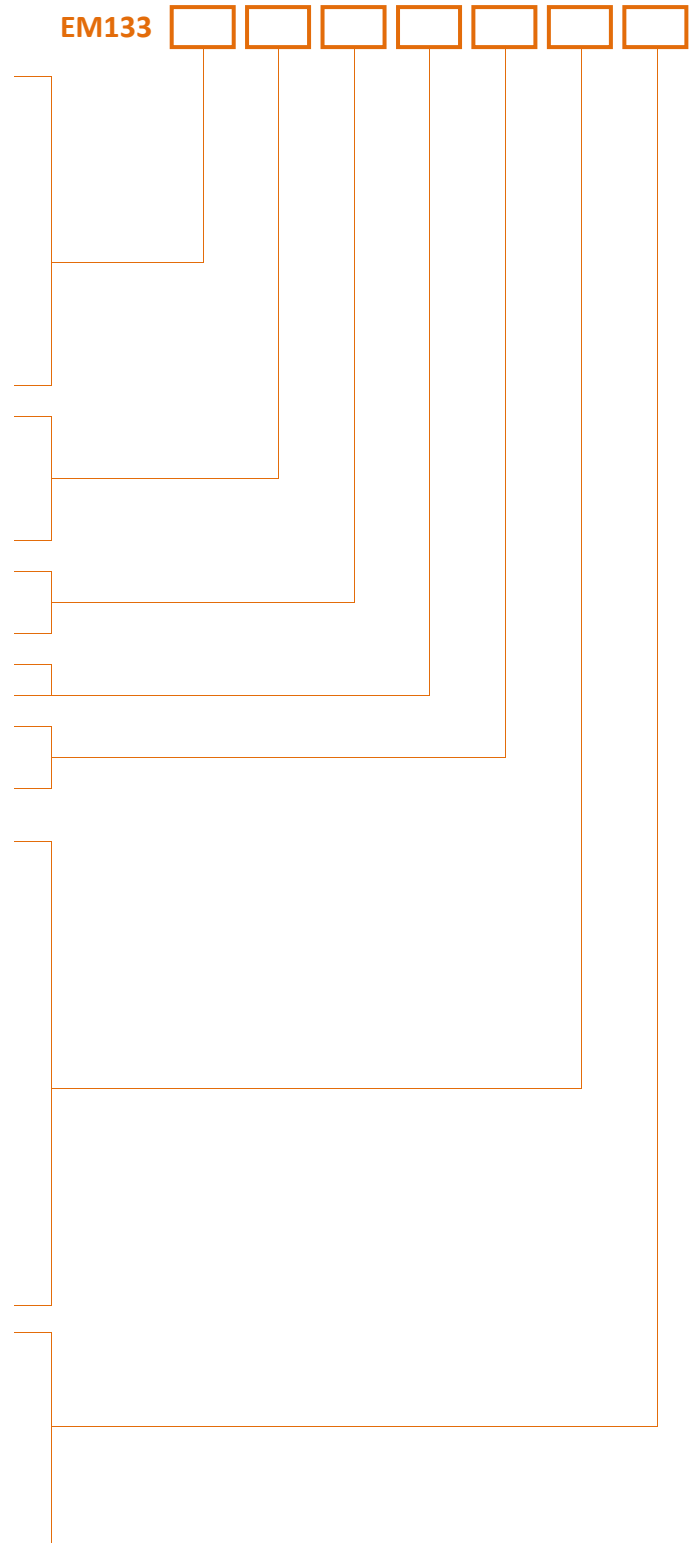

Note: The RF module and accessories are available in certain regions only. Please consult your local supplier.