


ЭНЕРГОМЕТРИКА
www.energometrika.ru

70 YEARS OF TRUST
LUMEL

PRODUCTS & SERVICES

CATALOG ▶

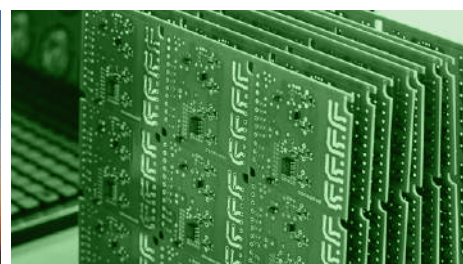

▷ LUMEL 4.0 - PLANT OF NEW TECHNOLOGIES



- ▷ OUR NEW PLANT BUILT IN 2020 POWERED BY A 125 KW LUMEL PHOTOVOLTAIC SYSTEM.
LUMEL S.A. - PLANT AREA - 3639 m².



- ▷ LUMEL ARENA
(SPORTS AND RECREATION FACILITY FOR EMPLOYEES AND THEIR FAMILIES) - AREA - 1007 m².



R&D
B&D

RESEARCH LABORATORY
ИЗСЛЕДОВАТЕЛЬСКАЯ ЛАБОРАТОРИЯ



SMT ASSEMBLY
СМТ АССЕМБЛИ

QUALITY INSPECTION
КОНТРОЛЬ КАЧЕСТВА



THT ASSEMBLY
ТНТ АССЕМБЛИ



WAREHOUSE
МАГАЗИН

CUSTOMER SERVICE
СЛУЖБА ОБСЛУЖИВАНИЯ



GUARANTEE OF THE HIGHEST QUALITY OF PRODUCTION AND SERVICES

To meet the expectations of our customers **we continuously improve the quality management system.** It takes place at every activity level, from the identification of the customer's needs, through the production process, to the research of the recipients satisfaction.

To guarantee the highest quality we continuously supervise the production processes, we aim at the permanent parameter improving and we use materials from suppliers, who meet the highest global standards.

We work in accordance with:

- Certificate **ISO 9001:2015,**
- Certificate **ISO 14001:2015,**
- Certificate **IATF 16949:2016.**

We fulfill all requirements of 2002/95/EC Directive **RoHS II 2011/65/UE and RoHS III 2015/863/UE** about limiting Hazardous Substances in our products.

Our products fulfill requirements:

- **Electromagnetic compatibility acc. to:**
 - immunity against electromagnetic interference EN 61000-6-2,
 - emission of electromagnetic interference EN 61000-6-4.
- **Safety acc. to:** EN 61010.
- **Category III instalation acc. to:** safety requirements for electrical equipment for measurement, control and laboratory use EN 61010.

We declare with full responsibility that all products manufactured by LUMEL S.A. fulfil all requirements of Regulation (WE) of the European Parliament and the European Council no 1907/2006 dated December 18, 2006 regarding registration, rating, permits and limitations regarding chemicals (**REACH**).

3 YEAR
WARRANTY




PRODUCT CODE
CONFIGURATOR
at www.lumel.com.pl


ePLAN


	PAGE		PAGE
OPTIMIZATION OF ENERGY COSTS	6	CONTROL	24
Meters and Analyzers of Power Network Parameters	7	Time & protection relays	24
Energy Meters with MID certification	9	Power supplies	24
Synchronization Meters	9	SOFTWARE TOOLS	25
PF Controllers	9	eCon - software for Configuration of Lumel Products	25
PROCESS VISUALIZATION SOFTWARE	10	Lumel Scanner	25
Promotic	10	ANALOG MEASUREMENTS	26
MEASUREMENTS OF ELECTRICAL & NON-ELECTRICAL QUANTITIES	11	Analog Meters	26
Digital Meters	11	Current Transformers	30
Transducers, Separators	14	Shunts	33
MEASUREMENTS OF ENVIRONMENTAL PARAMETERS	16	Adapter for DIN rail	33
LEVEL MEASUREMENT	17	Enlarging Frame	33
Ultrasonic Level Meter & Sensor	17	Cam Switches	34
TEMPERATURE & PROCESS CONTROL	18	PORTABLE MULTIMETERS & CLAMP METERS	35
Controllers	18	DIGITAL PROTECTION, AUTOMATION, MEASUREMENTS, CONTROL, REGISTRATION AND COMMUNICATION	39
Controllers for Injection Moulds	20	MV Protection Relays	39
Power Controllers	20	DETECTION GAMMA AND/OR NEUTRON RADIATION	
RECORDING	21	SMP Radiation Portal Monitors	41
Recorders & data logger	21	EMS, ODM, OEM SERVICES	43
COMMUNICATION	23	CALIBRATION & ATTESTATION	46
I/O Modules	23		
Data loggers	23		
Interface/protocol converters	24		

AUTOMATION:


EXPORT DEPARTMENT - OFFICE POLAND:
 + 48 68 45 75 130 or + 48 693 290 962
 export@lumel.com.pl


DACH / NL / BE SALES MANAGER
 +49 152 0947 1770

LATIN / FR / IT SALES MANAGER
 + 34 683 60 63 53

BALCAN / CZ / SK SALES MANAGER
 +36 20 9343 785





AP SALES MANAGER
 +886 935 276522

MEA / AFR / TR SALES MANAGER
 +971 52 465 2511



CY / GR / NORTH SALES MANAGER
 +357 99790671

INDIA SALES MANAGER
 +91 7755907813



CUSTOMER SERVICE:

 + 48 68 45 75 151
 + 48 68 45 75 152
 + 48 68 45 75 153
 + 48 68 45 75 154

EMS | ODM | OEM SERVICES:

 + 48 693 290 405 or + 48 68 45 75 144
 ems@lumel.com.pl

RESEARCH LABORATORY:

 + 48 68 45 75 161
 laboratorium@lumel.com.pl

PROTECTION RELAYS | CZIP:

 + 48 508 468 520
 czip@lumel.com.pl

CONTACT US

OPTIMIZATION OF ENERGY COSTS



Please get in touch with us, if you are looking for the ways to reduce the energy costs and improve the efficiency of the production processes at the same time!

Our solutions will help you:

- ▶ maintain a continuous monitoring of an ordered power level
 - ▶ avoid the penalty fees for exceeding this power
 - ▶ adjust a level of the ordered power to the actual demand (too low ordered power = penalties for exceeding it, too high ordered power = high fixed costs)
 - ▶ flatten the peak power by delaying the switching on of the most energy-consuming devices
- ▶ monitor an energy at the level of the lines / machines in order to
 - ▶ provide more accurate estimation of the production costs,
 - ▶ analyze the cost of media necessary to produce a given material
- ▶ locate the most energy-consuming loads in your plant based on their real energy consumption
- ▶ check the load of the machines on individual shifts
- ▶ monitor the voltage dips and the sources of electrical interferences that may cause unexpected downtimes
- ▶ account the energy costs internally by the halls, departments, etc.
- ▶ alert the maintenance staff in case of a failure
- ▶ manage energy in case of emergency conditions, e.g. request to lower the power due to network overload.

Besides the benefits mentioned above, it is possible to expand our systems with other useful functions, for example:

- ▶ monitoring of temperature in the switching stations to support plant safety
- ▶ monitoring of compressed air which allows detecting sources of the leaks that cause considerable costs - the compressors are often the most energy-consuming loads
- ▶ monitoring of other media: water, gas, heat
- ▶ monitoring of environmental parameters - temperature, humidity, CO₂, TVOC or light intensity in the halls
- ▶ monitoring the produced number of items / production details to improve productivity

METERS AND ANALYZERS OF POWER NETWORK PARAMETERS

OPTIMIZATION OF ENERGY COSTS



	N43	NR30	ND30	ND31	ND31LITE	N100	ND45	
Measured parameters (detailed information in user's manuals)	U_{LN} / U_{LL}			✓✓				
	average U_{LN} / U_{LL}		✓✓			@✓	✓✓	
	I_L / average I_L / I_N	✓✓/@				✓✓✓		
	P / Q / S				✓✓✓			
	$E_p / E_q / E_s$				✓✓✓			
	4-quadrant measurement	@				✓		
	PF / t _{exp} / cosφ / φ				✓✓/ - / -		✓✓/ - / ✓	
	f / THD U / THD I				✓✓✓			
	Harmonics / interharmonics	- / -	✓ 63 (NR30, NR30IoT) ✓ 51 (NR30PNET, NR30BAC) / -	✓ 63 (ND30, ND30IoT) ✓ 51 (ND30PNET, ND30BAC) / -	✓ 63 / -		✓ 51 / -	✓ 51 / ✓ 51
	P (15/30/60 min.)				✓✓✓			
	Q (15/30/60 min.)						✓✓✓	
	S (15/30/60 min.)				✓✓✓			
	I (15/30/60 min.)				✓✓✓			
	Time / Date / Temp.	✓/@ / -	✓✓/ -	✓✓✓			✓✓/ -	✓✓/ ✓✓
	Dips / Swells / Overvoltages							✓✓✓
Tariffs / Voltage asymmetry							✓ 4 / ✓	
Memory of min. and max. values				✓				
Inputs	1 A / 5 A or 63 A 57.7/100 V or 230 / 400 V or 290 / 500 V	1 A / 5 A or 63 A 57.7/100 V and 100 / 170 V or 230 / 400 V and 400 / 690 V	1 A / 5 A 57.7 / 100 V 230 / 400 V or 110 / 190 V 400 / 690 V	2 x Pt100 - option 2 x binary - option	2 x Pt100	1 A / 5 A 57.7 / 100 V or 230 / 400 V or 400 / 690 V	1 A / 5 A 57.7 / 100 V or 230 / 400 V or 69.3 / 120 V	
Outputs	3 x relay 1 x pulse	2 x relay	1 x 0 / 4...20 mA (option) 2 x relay	1 x 0 / 4...20 mA 2 x relay	2 x relay	pulse 0 / 12...36 V 1 x pulse, 1 x 0 / 4...20 mA + 3 x relay or 3 x 20...0...20 mA + 1 x relay	2 x Pt100 / Pt1000 / 5kΩ 4 or 6 x logic - option optionally: 3 or 6 x 0 / 4...20 mA; 4 or 8 x relay	
Interface	RS-485 Modbus Slave	RS-485 Modbus Slave options: NR30: Ethernet NR30PNET: Profinet NR30IoT: MQTT NR30BAC: BACnet IP	RS-485 Modbus Slave options: ND30: Ethernet ND30PNET: Profinet ND30IoT: MQTT ND30BAC: BACnet IP	RS-485 Modbus Slave MQTT BACnet IP Ethernet TCP/IP	RS-485 Modbus Slave	RS-485 Modbus Slave Ethernet 10/100 Base-T Modbus TCP, www, FTP - option	RS-485 Modbus Slave, USB Device & Host Ethernet 10/100 Base-T Modbus TCP, www, FTP, NTP	
Display	LCD 4x3 digits + 1 x 7 digits	LCD 20 characters x 4 rows	3.5" colour TFT LCD 320x240 pixel			LED 4 x 4 ½ digit, backlight unit, 2-colour display (red, green) (14 mm)	5.6" LCD TFT colour touch screen 640 x 480 pixel	
Supply voltage	85...253 V a.c. / 90...300 V d.c. or 20...40 V a.c. / 20...60 V d.c.		85...253 V a.c. / 90...300 V d.c. or 20...40 V a.c. / 20...60 V d.c.			85...253 V a.c. / 90...300 V d.c.		
Protection IP	IP50		IP65			IP40	IP54	
Ext. dimensions	105 x 110 x 60 mm		96 x 96 x 77 mm			144 x 144 x 77 mm	144 x 144 x 104 mm	
Programming	free eCon software (using miniUSB) or using buttons		free eCon software - using RS-485 or Ethernet (ND31, N100) or using buttons				dedicated software or using touch screen	
Additional functions	connection with S4A0 module (module of 4 analog outputs)		<ul style="list-style-type: none"> selection of displayed quantities on each of the 12 programmable screens galvanic isolation between input, output, supply and interface 			<ul style="list-style-type: none"> selection of displayed quantities on each of the 20 programmable screens galvanic isolation of current and voltage inputs data archiving in the internal memory 8 GB available special version with input frequency up to 500 Hz 	<ul style="list-style-type: none"> measurement class A/S measurement and logging of energy quality acc. to EN 50160, EN 61000-4-30, EN 6100-4-7 oscilloscope galvanic isolation of measuring current and voltage inputs data archiving on SD card 	
		NR30, NR30IoT: data archiving up to 32 parameters supervisory relay	ND30IoT, ND30PNET: temperature measurement - 2 x input Pt100	temperature measurement - 2 x input Pt100				ND30IoT, ND31: data archiving in the internal memory 8 GB supervisory relay

@ - parameter available only through digital interface RS-485 and/or Ethernet

METERS AND ANALYZERS OF POWER NETWORK PARAMETERS

OPTIMIZATION OF ENERGY COSTS



	ND20LITE	ND20CT	ND20	ND25	N14	ND10	
Measured parameters (detailed information in user's manuals)	U_{LN} / U_{LL}		✓✓			✓/✓	
	average U_{LN} / U_{LL}		@/@		✓/-	✓/✓	
	I_L / average I_L / I_N		✓/✓/✓		✓/✓/-	✓/✓/✓	
	P / Q / S		✓/✓/✓			✓/✓/✓	
	$E_p / E_q / E_s$		✓/✓/-		✓/✓/✓	✓/✓/-	
	4-quadrant measurement			✓		✓	
	PF / tgφ / cosφ / φ		✓/✓/✓/@		✓/-/-/✓	✓/✓/@/@	
	f / THD U / THD I			✓/✓/✓		✓/-/-	✓/✓/✓
	Harmonics		-	✓ 21	✓ 31		-
	P (15/30/60 min.)		✓/✓/✓		✓/✓/-	✓/-/-	✓/✓/✓
	S (15/30/60 min.)		-		✓/✓/-		-
	I (15/30/60 min.)		-		✓/✓/-		-
	Time / Date / Temp.		✓/-/-		✓/✓/-		✓/✓/-
	Memory of min. and max. values			✓			✓
Inputs	1 A / 5 A 57.7/100 V 69.3/120 V 230/400 V	0.1 A and 0.25 A 57.7/100 V or 230/400 V	1 A / 5 A 57.7/100 V or 230/400 V or 290/500 V or 63.5/110 V or 69.3/ 120 V	1 A / 5 A 57.5...346.42 V/ 100...600 V	1 A or 5 A 57.7/100 V or 230/400 V or 400/690 V	1 A or 5 A 57.7/100 V or 230/400 V or 290/500 V	
Outputs	1 x relay 1 x pulse	1 x 0/4...20 mA (option) 1 x relay 1 x pulse	1 x 0/4...20 mA 1 x relay 1 x pulse	2 x relay (option)	1 x relay 1 x pulse	2 x relays 1 x pulse	
Interface		RS-485 Modbus Slave		RS-485 Modbus Slave (option) or Ethernet Modbus TCP (option) or BACnet IP (option)	RS-485 Modbus Slave	RS-485 Modbus Slave	
Display		3.5" LCD 3 x 4 (11 mm) + 1 x 5 digits (9 mm)		3.5" LCD 4 x 4 digits + 1 x 9 digits	LED 3 x 3 digits (14 mm)	3.5" LCD 3 x 4 digits (16 mm)	
Supply voltage	85...253 V a.c./ 90...300 V d.c.	85...253 V a.c./ 90...300 V d.c. or 20...40 V a.c./ 20...60 V d.c.		100...550 V a.c./d.c.	85...253 V a.c./d.c.	50...64 V a.c. or 195...253 V a.c. or 246...300 V a.c. from measuring circuit	
Protection IP		IP65		IP54	IP40	IP65	
Ext. dimensions		96 x 96 x 77 mm		96 x 96 x 70 mm	96 x 96 x 70.5 mm	96 x 96 x 77 mm	
Programming		free eCon software (using RS-485) or using buttons		-	free eCon software (using RS-485) or using buttons		
Additional functions		<ul style="list-style-type: none"> easy installation of meter and current transformer only to cooperation with dedicated current transformers L3XX and LJXX (see page 32) 	<ul style="list-style-type: none"> memory of 9000 samples for mean power 	<ul style="list-style-type: none"> up to 28 programmable screens data archiving in the internal memory 8 MB 		<ul style="list-style-type: none"> galvanic isolation of current inputs 	
		<ul style="list-style-type: none"> galvanic isolation of current inputs 					

@ - parameter available only through digital interface RS-485 and/or Ethernet

ENERGY METERS WITH MID CERTIFICATE

OPTIMIZATION OF ENERGY COSTS

ENERGY METER FOR DIN RAIL MOUNTING



NEW



	NMID30-1	NMID30-2	NR32
Input	1 A / 5 A 3 x 230 / 400 V	10 (100A) 3 x 230 / 400 V	1 A / 5 A 57.5...346.42 V/ 100...600 V
Output	<ul style="list-style-type: none"> • relay output • pulse output (OC type), 3200 imp/ kWh 		<ul style="list-style-type: none"> • 1/2 x binary - option • 2 x relay output (option) • 1/2 x pulse output (option)
Interface	RS-485 Modbus RTU		RS-485 Modbus Slave
Supply voltage	85...275 V a.c. 120...380 V d.c.		100...550 V a.c./d.c.
Display	3 x 4 digits		3 x 4 digits
Protection rating	IP51		IP54
External dimensions	72 x 94.5 mm acc. to DIN 43880	76 x 100 mm acc. to DIN 43880	72 x 90 mm
Additional functions	<ul style="list-style-type: none"> • 16 measured parameters • password protection • programmable averaging time of the Demand type 		<ul style="list-style-type: none"> • two tariffs • up to 10 user-configurable screens • active energy measurement in 0.2s class

SYNCHRONIZATION METERS & PF CONTROLLERS

OPTIMIZATION OF ENERGY COSTS

SYNCHRONIZATION METERS

PF CONTROLLERS



NS5



SA12/SA19



NF20

	NS5	SA12/SA19	NF20
Input	50...150 V 150...400 V	57.8...500 V	programmable 1 A / 5 A 30...550 V
Output	2 x relays	-	4/6/8 or 6/8/12 switching outputs, 1 alarm relay
Interface	RS-485 Modbus Ethernet 10/100 Base-T Modbus TCP, www - option	-	RS-485 Modbus - option
Display	3.5" colour TFT LCD, 320x240 pixel	LED indicator	graphic display LCD, 2 x 16 characters
Supply voltage	85..253 V a.c. , 90..300 V d.c. or 20..40 V a.c. , 20..60 V d.c.	-	110...550 V a.c.
Protection rating	IP65	IP52	IP54
External dimensions	96 x 96 x 77 mm	96 x 96 x 111.5 mm (SA19), 144 x 144 x 111.5 (SA12)	96 x 96 x 51 (without extension modules) 96 x 96 x 75 (with extension modules) 144 x 144 x 56
Programming	free eCon software, (using RS-485 or Ethernet) or using buttons	-	-
Additional functions	<ul style="list-style-type: none"> • memory of min. and max. values • many forms of data presentation bargraph, digital • additional control inputs 	<ul style="list-style-type: none"> • one or two ranges of input voltage 	<ul style="list-style-type: none"> • RTC - option

Promotic is a modern SCADA program for building both small and very large automation systems. It enables the visualization, analysis and archiving of industrial processes.





Program basic features:

- ▶ an extensive library of communication protocols allows to communicate with the devices of the best-known automation manufacturers,
- ▶ support of the most popular databases - (dBase, MS SQL Server, MySQL, Oracle and others),
- ▶ web server with full functionality for PCs and mobile devices,
- ▶ extensive library of static and dynamic graphic components,
- ▶ possibility to design large systems,
- ▶ sending alarm e-mails and text messages,
- ▶ creating logic and additional functionalities in JavaScript,
- ▶ open program with and expansion possibilities.

Examples of application areas:

- ▶ measurement and regulation of energy consumption and other utilities (electricity, heat, gas, water ...),
- ▶ processes related to food processing (breweries, dairies, sugar factories, mills, ecology (emission monitoring, wastewater treatment plants, dust removal, ...),
- ▶ telemetry and control systems (water treatment plants, gas plants, mines, heat distribution networks,
- ▶ heat management (heat exchange stations, boiler rooms, ...)
- ▶ other applications matching customer needs.

Unlimited license is with free upgrades for 10 years!

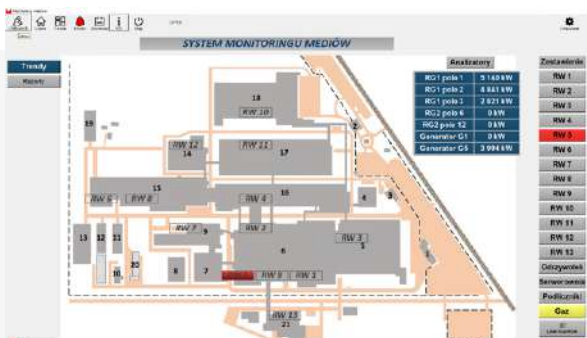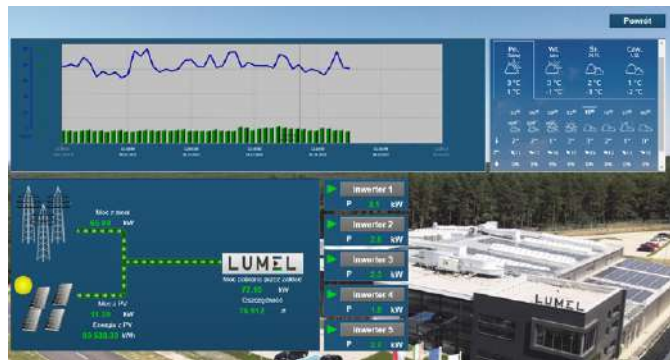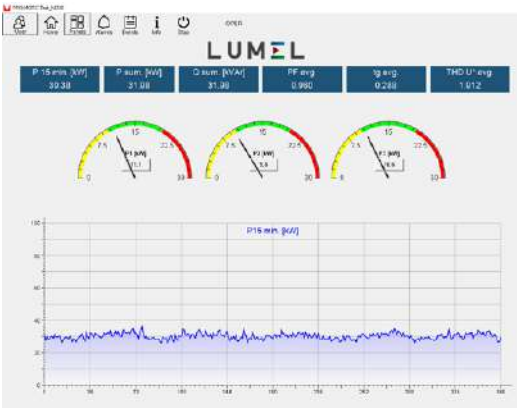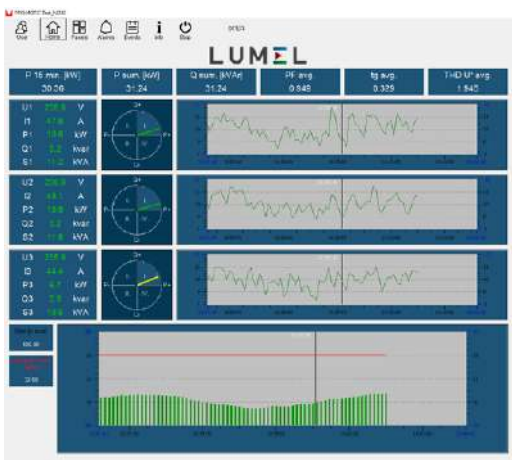

ALBION

Raport OEE pracy maszyny [%]

PRINT

Data	Trendy: Przeszłość_F_111 (0,7 40)		Trendy: Przeszłość_F_112 (0,7 40)		Trendy: Przeszłość_F_113 (0,7 40)		Trendy: Przeszłość_F_114 (0,7 40)		Trendy: Przeszłość_F_115 (0,7 40)				
	06:00	14:00	22:00	06:00	14:00	22:00	06:00	14:00	22:00	06:00			
01.02.2013	28,00	62,15	97,29	61,35	1,44	98,14	92,08	90,23	1,87	3,54	49,27	9,77	12,92
02.02.2013	28,00	54,09	81,06	42,5	2,08	91,47	99,38	94,39	88,13	17,29	7,49	32,08	28,04
03.02.2013	28,00	59,15	74,64	91,94		90,51	76,5	10,4	3,33	11,64	90,44	9,78	8,94
04.02.2013	28,00	59,00	77,5		1,71	7,92	1,9	73,48		33,33	2,71	13,79	
05.02.2013	28,00	56,00			4,78	8,04	5,41						
06.02.2013	28,00	54,00						96,94	79,02	79,17	87,92	8,37	35
07.02.2013	28,00	59,00	11,04		41,42	1,69		63,43	48,46	73,88	4,98	2,40	9,16
08.02.2013	28,00	54,00	38,13	22,71				95,21	99,05	100	5	2,08	0,21
09.02.2013	28,00	54,00	72,42	10,72	1,71			92,42	73,88	71,29	6,61	24,17	49,39
10.02.2013	28,00	54,00	58,83	20,88	5,63			82,13	60	49,38	55	33,33	9,58
11.02.2013	28,00	54,00						85,63	89,49		42,9	29,31	28,34
12.02.2013	28,00	54,00	27,08										1,87
13.02.2013	28,00	54,00											
14.02.2013	28,00	54,00	55,42	59,11	17,29	2,29	90,42	64,38	22,90	71,04	20,71	49,28	20,63
15.02.2013	28,00	54,00	51,67	70	12,5			85,42	88,54	81,13	22,71	0,63	47,08
Wynik całkowity		64,88	97,51	32,48	1,02	1,22	1,57	88,53	83,4	64,90	30,61	19,66	11,34

Wymiar tablicy: - 64,88 97,51 32,48 1,02 1,22 1,57 88,53 83,4 64,90 30,61 19,66 11,34 11,2 11,78

Parametry wyświetlania raportu

Raport OEE pracy maszyn [%]

Wypełnić czas początkowy: 14 Oczeń

Ola przedziału czasu: 8 Dni robocze

Wybrane zmiany: 1, 2, 3

Przebieg czasu do zliczeń: Cała zmiana

Orientacja wydruku strony: A4 - w pionie

Wyrzucić nieaktualne linie: Wyrzucić nieaktualne linie

Zapisz do pliku CSV: Zapisz do pliku CSV

Dane źródłowe, rodzaj filtracji:

Nazwa trendu	Typ trendu	Typ trendu	Ola trendu	Quant trendu
Trendy: Przeszłość_F_111	0,7	40	1,3	50
Trendy: Przeszłość_F_112	0,7	40	1,3	50
Trendy: Przeszłość_F_113	0,7	40	1,3	50
Trendy: Przeszłość_F_114	0,7	40	1,3	50
Trendy: Przeszłość_F_115	0,7	40	1,3	50

Wyświetl raport

DIGITAL METERS

MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES



	N24	N25	N19Z	N20	N20PLUS	N20HPLUS	N20Z	N20ZPLUS	N21	N27D	LLM3
Input	fixed N24T, N25T: Pt100, J, K N24S, N25S: 0/4...20 mA, ±60 mV d.c., ±10 V d.c. N24H, N25H: ±100, ±250, ±400 V d.c., ±1/5 A d.c. N24Z, N25Z: 100, 250, 400 V a.c., 1/5 A a.c., 20...500 Hz		fixed 1 A, 5 A a.c. 64 V, 110 V 240 V, 600 V a.c. 64/110 V, 133/230 V, 239.6/ 415 V a.c.	fixed Pt100, J, K 0/4...20 mA, ±20 mA 0...60 mV, 0...75 mV (N20Plus), 0...10 V, ±10 V	fixed ±100, ±400 V d.c.	fixed 1 A, 5 A a.c. 100 V, 250 V, 400 V a.c. 20...500 Hz	programmable Pt100 J, K ±20 mA, ±10 V, ±60 mV	fixed 0...500 V a.c. 0...63 A a.c. -31.5...31.5 kW 45...500 Hz	3x 230...400 V a.c.		
Output	supplying output (24 V/ 30 mA) for S and T versions (option)		-	• 2 x OC • supplying output (24 V/ 30 mA)	• 2 x OC			• 1 x relay NO, 250 V~/0.5 A~, • supplying output 24 V d.c. ± 5%, 30 mA	-	-	
Display	red LED 4 digits (20 mm)	red LED 5 digits (14 mm)	red LED 4 digits (14 mm)	3-colour programmable LED 5 digits (14 mm)				OLED 128 x 32 pixels in amber colour	yellow LED 4 digits (8.5 mm)	3 x dual red LEDs	
Supply voltage	24 V a.c., 110 V a.c., 230 V a.c., 85...253 V a.c./d.c., 20...40 V a.c./d.c. (option)		80...300 V a.c., 40...300 V a.c./d.c. 20...60 V a.c./d.c.	85...253 V or 20...40 V a.c./d.c. (for N20, N20Z, N20ZPLUS) 85...253 V or 20...40 V a.c./ 20...60 V d.c. (N20PLUS, N20HPLUS)				universal 22..60 V a.c. / 20..60 V d.c. (terminals 12-13) 60..253 V a.c. / 60..300 V d.c. (terminals 13-14)	230 V a.c.	230 V a.c.	
Protection rating	IP65		IP50 or IP65-option	IP65				IP65	IP00	IP50	
External dimensions	96 x 48 x 64 mm		96 x 96 x 41 mm or 96 x 48 x 73 mm	96 x 48 x 64 mm				110 x 53 x 60 mm	57 x 110 x 60 mm		
Program- ming	free eCon software (using PD14 programmer)		-	free eCon software (using PD14 programmer - N20, N20Z or through RS-485 - N20PLUS, N20HPLUS and N20ZPLUS using PD10)				free eCon software (using miniUSB)	-	-	
Additional functions	-		-	• rescaling				• vertical display	selection of displayed quantities (kW, V, A, Hz)	external live line indicator LLB	

DIGITAL METERS

MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES



	N30U	N30H	N30o	N30P
Input	programmable Pt100/500/1000 J, K, N, E, R, S ± 20 mA 0...10 V, -10...60 mV 400, 4000 Ω	programmable 1/5 A d.c., ± 100/ ± 500 V d.c.	programmable pulse input (pulses, frequency, rotational speed, period, operating time counter, encoder)	programmable 1/5 A 100/400 V 1-phase power network parameters
Output	4 x relays (2 NO + optional 2 NOC), 1 x analog 0/4...20 mA or 0...10 V - option, 1 x pulse in N30P meter - option, supplying output (24 V/ 30 mA) in N30U and N300 (for supply 85...253 V)			
Interface	RS-485 Modbus Slave - option			
Display	3-colour programmable LED 5 digits (14 mm)			
Supply voltage	85...253 V a.c./d.c. or 20...40 V a.c., 20...60 V d.c.		85...253 V a.c./d.c. or 20...40 V a.c./d.c.	
Protection rating	IP65			
External dimensions	96 x 48 x 93 mm			
Programming	free eCon software (using RS-485) or using buttons			
Additional functions	<ul style="list-style-type: none"> Conversion of any measured value into a current or voltage analog signal. Storage of minimal and maximal values for all measured quantities. 21-point rescaling for the measured value (does not apply to N30P and N27P) 		<ul style="list-style-type: none"> Password protection. Programmable current and voltage transformer ratio (applies to N27P and N30P). 	

NEW



	N31U	N32U	N32o	N32H	N32P	N27P	NR10
Input	programmable Pt100/1000 J, K, N, E, R, S ± 20 mA, 4...20 mA ± 10 V ± 60, 150, 300 mV 400, 4000 Ω	programmable Pt100/500/1000 J, K, N, E, R, S ± 20 mA, 4...20 mA ± 10 V ± 60, 150, 300 mV 400, 4000 Ω	programmable 2 x pulse input (pulses, frequency, rotational speed, period, operating time counter, encoder)	programmable current from the shunt ± 75...1500 mV d.c. voltage ± 50...600 V d.c. measurement of d.c. circuit parameters	programmable 1/5 A a.c. 100/230/400 V a.c. 1-phase power network parameters	programmable 1/5 A or direct measurement 32/63 A 100 V/400 V a.c. 1-phase power network parameters	10A (100 A) 230 V measurement of 1-phase power network parameters
Output	1 x relay output (NO) 1 x supplying output 24 V d.c.	1 x NO contact 3 x relays with changeover contact - option 1 x analog 0/4...20 mA or 0...10 V - option 1 x OC output (only in N32P, N32H) 1 x supplying output 24 V d.c. 30 mA (only in N32U, N32o)				2 relays (2 NO) or 1 x relay (NO) + 1 x output 0/4...20 mA	2 x pulse
Interface	RS-485 Modbus Slave						
Display	high contrast LCD with backlight and programmable measuring unit row 1: 6-digit; digits height 12.85 mm row 2: 5-digit; digits height 7.5 mm					OLED 0.96" yellow	LCD with backlight
Supply voltage	40...253 V a.c., 20...300 V d.c.	85...253 V a.c., 90...300 V d.c. or 20...40 V a.c., 20...60 V d.c.				85...253 V a.c. 90...300 V d.c.	176...276 V a.c.
Protection rating	IP65					IP50 (1/5 A) or IP00 (32/63 A)	IP51
External dimensions	96 x 48 x 93 mm					110 x 53 x 60 mm	99 x 36 x 63 mm
Programming	free eCon software (using RS-485) or using buttons					free eCon software (using miniUSB, RS-485 or buttons)	using RS-485 or using buttons
Additional functions	<ul style="list-style-type: none"> second row of the display - displaying the unit, time or other measured value conversion of any measured value into an analog signal memory of min. and max. for measured values advanced functions of averaging measured quantities 32-point individual characteristic (not applicable to N32H and N32P) 					<ul style="list-style-type: none"> Password protection Programmable current and voltage transformer ratio 	<ul style="list-style-type: none"> Password protection
	wide supply voltage range	-	-	-	-		

DIGITAL METERS

MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES



NA5PLUS




NA6PLUS


Input	programmable Pt100/500/1000, J, K, N, E, R, S, T ± 40 mA d.c., ± 5 A d.c., ± 75 mV d.c., ± 300 mV d.c., ± 10 V d.c., ± 0...600 V d.c., 0...5 kΩ	
Output	4 x relay or 8 x OC (option); 1 x analog (option)	
Interface	RS-485 Modbus Slave	
Bargraph	3- or 7-colour programmable vertical	2 x 3- or 2 x 7-colour programmable vertical
Display	LED 4 digits (7 mm)	2 x LED 4 digits (7 mm)
Supply voltage	95...253 V a.c./d.c. or 20...40 V a.c./ 20...60 V d.c.	
Protection rating	IP50	
External dimensions	48 x 144 x 100 mm	
Programming	free eCon software (using RS-485) or using buttons	
Additional functions	<ul style="list-style-type: none"> • 21-point rescaling (NA5PLUS and NA6PLUS) parameters • arithmetical functions x^2, \sqrt{x}, (+, -, *, / - only in NA6PLUS) • logging of the measured signal in programmed time intervals (800 samples) 	<ul style="list-style-type: none"> • memory of minimal and maximal values for all measured • password protection • conversion of any measured value into a current or voltage analog signal

▷ APPLICATION EXAMPLE

Temperature and flow measurement in a pipeline

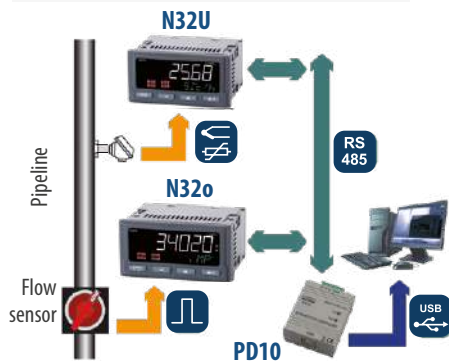

Air temperature and humidity measurement

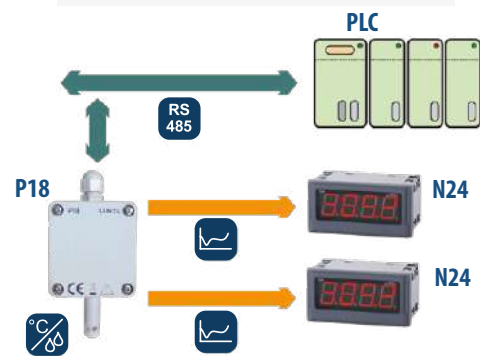

Current measurement in an electroplating plant



Measurement, alarming and logging of load current for a 1-phase engine



TRANSDUCERS, SEPARATORS







MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES

BASIC TRANSDUCERS

										
	P10	P10Z	P20	P20Z	T22CT	T23CT	P21Z	P20H	P15	P17
Input	fixed 4...20 mA d.c. 0...1/5/20/ 100 mA d.c. 0...60/75/100/ 500 mV d.c. 0...1/5/10/150V d.c.	fixed 1/5 A a.c. 0...100/250/300V a.c.	programmable Pt100/250/500/1000, J, K, S, N 0/4...20, ±20 mA 0...5/10, ±5, ±10 V ±60, ±150 mV 0...400/4000 Ω	fixed 0..60/100/ 150/250/ 400/500/ 600 V a.c. 0..1/5 A a.c.	fixed 50/100/150/ 200/250/ 300/400/ 500/600/ 750 A a.c.	fixed 50, 100, 150, 200, 300 A a.c./d.c.	fixed 0...100/250/ /400 V a.c. 0...1/5 A a.c. 20...500 Hz	fixed 100, 250, 400V d.c. ±100, ±250, ±400 V d.c. ±1, ±5 A d.c.	fixed 0/4...20 mA 1...5 mA	fixed Pt100 J, K, N, E, 0...10 V 0...60 mV
Output	0/4...20 mA or 0/2...10 V	0/2...10 mA or 0/4...20 mA or 0...10 V or 0...5 V	0/4...20 mA or 0...10 V	0...20 mA or 4...20 mA	4...20 mA	0/4...20 mA or 0...10 V or RS-485 Modbus Slave	2 x 0/4...20 mA	passive 0/4...20 mA		
Supply voltage	24...60 V a.c./d.c. 60...300 V a.c./d.c.	24...60 V a.c./d.c. 40...300 V a.c./d.c.	85...253 V a.c./d.c. or 20...85 V d.c./ 20...65 V a.c.	85...253 V a.c./d.c. or 20...40 V a.c./d.c.	24 V d.c.	85...253 V a.c. / 90...300 V d.c. or 20...40 V a.c. / 20...60 V d.c.	20...40 V a.c. 20...60 V d.c. 60...300 V a.c./d.c.	supplied from output current loop		
Protection rating	IP40				IP20	IP65	IP40		IP50	
External dimensions	22.5 x 65.5 x 106.5 mm		22.5 x 120 x 100 mm		70x92x44 mm (up to 300 A) or 90x115x58 mm (150 - 750 A)	70 x 92 x 47 mm	22.5 x 120 x 100 mm		22.5 x 65.5 x 106.5 mm	6.2x77.5 x 100 mm
Additional functions	-	-	free eCon software (using PD14 programmer)	-	hole diameter: 28 mm or 31 mm	hole diameter: 28 mm busbar: 30 x 10 mm	free eCon software (using PD14 programmer)	-	-	

SEPARATORS

ADVANCED TRANSDUCERS

						
	P20G	P17G	P30U	P300	P30H	P30P
Input	programmable 0/4...20 mA ±20 mA 0...5/10 V ±5V, ±10 V	0/4...20 mA	programmable Pt100/250/500/1000, Cu100, Ni100, Ni1000 J, K, N, E, R, S, T, B 0...4/20, ±20 mA -5...20, ±75, ±200 mV, ±10 V, ±24 V 400, 2000, 5500 Ω, RS-485 Master or Slave	2 programmable inputs: pulse counter, frequency, rotational speed, period, operating time counter, pulse differential counter on inputs or encoder	d.c. network parameters programmable current using shunt ± 150 mV voltage 0...12/48/100/250 V voltage 0...600/1000V in set with additional D5 resistor	1-phase power network parameters programmable fixed 1A (X/1A), 5A (X/5A) 100 V(x/100 V) or 250 V
Output	programmable -20...20 mA -10...10 V	active output 0/4...20mA	1 x analog 0/4...20 mA or 0...10 V 1 x relay NO 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	1 x analog 0/4...20 mA or 0...10 V 1 x relay NO 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	1 x analog 0/4...20 mA or 0...10 V 1 x relay NO optionally exchangeable with additional analog output 0/4...20 mA or 0...10 V 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	
Interface	-	-	RS-485 Modbus (Slave or Master) - standard Ethernet 10/100 Base-T - option			-
Display	-	-	LCD 2x8 characters with LED backlight			-
Supply voltage	85...253 V a.c./d.c. or 20...85 V d.c., 20...65 V a.c.	supplied from input current loop	85...253 V a.c./d.c. or 20...40 V a.c./20...60 V d.c.		85...253 V a.c. , 85...300 V d.c. or 20...40 V a.c., 20...60 V d.c.	
Protection rating	IP40	IP50	IP40			
External dimensions	22.5 x 120 x 100 mm	6.2x77.5x100mm	45 x 120 x 100 mm			
Programming	-	-	using buttons or free eCon software using RS-485 Modbus, Ethernet (option)			
Additional functions	free eCon software (using PD14 programmer)	-	<ul style="list-style-type: none"> alarms indicated on the display WWW server, FTP, Modbus TCP/IP Slave (optionally) 		<ul style="list-style-type: none"> internal memory 534336 samples data logging in internal memory or on SD card (optionally) 	
			<ul style="list-style-type: none"> rescaling (up to 21 points) memory of min. and max. values (with time stamp) mathematic functions independent for both inputs filtration of periodic signals (only P300) 		<ul style="list-style-type: none"> memory of min. and max. values 	

TRANSDUCERS, SEPARATORS

MEASUREMENTS OF ELECTRICAL AND NON-ELECTRICAL QUANTITIES

POWER TRANSDUCERS



	P41	P30P	P43
Input	programmable 1/ 5 A, 100/ 400 V 1-phase power network parameters	fixed 1/5 A, 100 or 250 V 1-phase power network parameters	fixed 1 or 5 A, 100 or 400 V 3-phase power network parameters
Output	1 x analog programmable ± 20 mA	1 x analog 0/4...20 mA or 0...10 V 1 x NO relay optionally exchangeable with additional analog output 0/4...20 mA or 0...10 V 1 x additional NO relay optionally exchangeable with 24 V, 30 mA supplying output	4 x relays or 2 x relay + 2 x analog programmable ± 20 mA or 4 x analog programmable ± 20 mA
Interface	RS-485 Modbus Slave	RS-485 Modbus (Slave or Master) - standard Ethernet 10/100 Base-T - option	RS-485 Modbus Slave
Display	-	LCD 2x8 characters with LED backlight	-
Supply voltage	85...253 V a.c./90...300 V d.c. or 20...40 V a.c./20...60 V d.c.	85...253 V a.c., 85...300 V d.c. or 20...40 V a.c., 20...60 V d.c.	85...253 V a.c./90...300 V d.c. or 20...40 V a.c./20...60 V d.c.
Protection rating	IP40		
External dimensions	45 x 120 x 100 mm		90 x 120 x 100 mm
Programming	free eCon software using USB or RS-485	using buttons or free eCon software using RS-485 Modbus, HTTP (option)	free eCon software using USB or RS-485
Additional functions	<ul style="list-style-type: none"> memory for selected measured value – 9 000 samples memory of minimal and maximal values programmable current and voltage transformer ratios 	<ul style="list-style-type: none"> alarms indicated on the display internal memory 534336 samples programmable current and voltage transformer ratios WWW server, FTP, Modbus TCP/IP Slave (optionally) data logging in internal memory or on SD card (optionally) 	<ul style="list-style-type: none"> memory for average power – 9 000 samples memory of minimal and maximal values programmable current and voltage transformer ratios pulse output

P18 AND P19 TEMPERATURE AND HUMIDITY TRANSDUCERS



	P18L	P18	P18D	P18S
Measurement range	-30 ... -20 ... 60 ... 85°C or 0...100% RH	-30 ... -20 ... 60 ... 85°C, 0...100% RH		
Output	passive 4...20 mA	2 x 4...20 mA or 0...10 V (option)		-
Interface	-	RS-485 Modbus		
Galvanic isolation	-	supply/ RS-485 (for version without analog outputs)		supply/ RS-485
Supply voltage	19...30 V d.c. (supplied by a current loop)	9 ... 24 V d.c./a.c		9 ... 28 V d.c./a.c
Protection rating	IP65			
External dimensions	38 x 58 x 118 mm			(sensor case) 86 x 12.5 mm
Additional functions	-	<ul style="list-style-type: none"> calculation of other quantities (dew-point temp.; absolute humidity) memory of measured and calculated min. and max. values 		<ul style="list-style-type: none"> wire to connect RS-485 and supply
		<ul style="list-style-type: none"> available version with sensor mounted on the wire 0.5 m 		
		-		<ul style="list-style-type: none"> data presentation on a LCD display configuration of transmission parameters using the capacitive button

MEASUREMENTS OF ENVIRONMENTAL PARAMETERS

HUMIDITY & TEMPERATURE MONITOR



MQTT



ENVIRONMENTAL PARAMETERS DATA LOGGER



MQTT

	HT20	HT20IoT	HT22IoT
Number of channels	up to 4 channels (temperature, humidity relative and absolute, dew point)		up to 12 channels (temperature, humidity relative and absolute, dew point, illuminance, total volatile organic compounds - TVOC, CO ₂ concentration)
Input	built-in temperature and humidity sensor		built-in temperature and humidity sensor, illuminance, TVOC, CO ₂ concentration sensor
Output	Modbus TCP/IP, Modbus RTU (only for HT22IoT)		
Measurement range	-20...60 °C, 0...100% RH		-20...60 °C, 10...90% RH, 0...60000 lx, 0...60000 ppb, 400...60000 ppm
Interface	Ethernet (WWW, FTP, SMTP, DHCP); RS-485 Modbus RTU (only for HT22IoT)		
	HT20IoT: MQTT		MQTT
Memory	internal - 8GB		
Display	LCD, 2 x 16 characters		
Supply voltage	6 V d.c. or PoE IEEE 802.3af - option		
Protecting rating	IP20		
External dimensions	150 x 100 x 30 mm		
Additional functions	<ul style="list-style-type: none"> data presentation on a LCD display and on website parameter configuration through a web browser 		<ul style="list-style-type: none"> email messages in case of alarm occurs acoustic signaling of alarm events

APPLICATION EXAMPLE

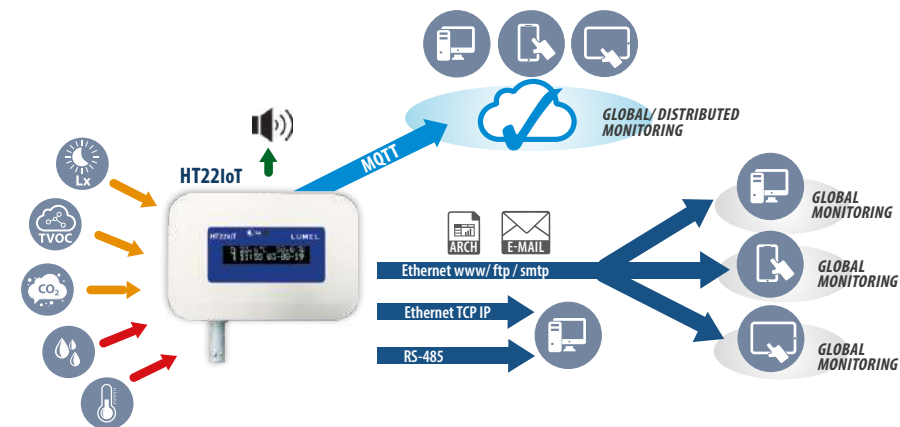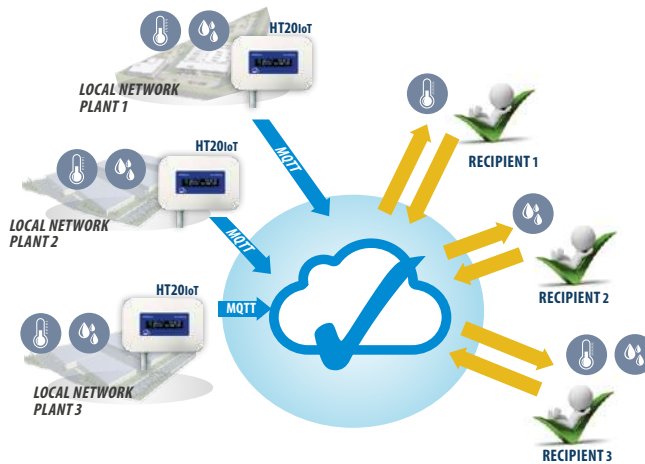

ULTRASONIC LEVEL METER & SENSOR

LEVEL MEASUREMENT

ULTRASONIC LEVEL METER



ULT20








ULTRASONIC LEVEL SENSOR




ULS10

Range of distance measurement	0.5...8 m The measuring range is strongly dependent on the environment in which the measurements are made and the surface from which the ultrasonic wave is reflected. Typical damping for a given environment (reflective medium) is summarized in the table next.	10 m or 15 m
Measurement resolution	0.001 m	0.001 m
Output	1x analog 0/4...20 mA 1 x relay (2 NO outputs) 1 x pulse	1 x analog 4...20 mA
Interface	RS-485 Modbus Slave USB Device, v.2.0.	RS-485 Modbus Slave
Supply voltage	12...24...40V d.c.	24 V d.c./ 300 mA
Protection rating	IP65	IP66 or IP68
Programming	free eCon software	
Additional functions	<ul style="list-style-type: none"> two 32-points individual characteristic (recalculate functions) memory of min. and max. values (with time stamp) internal data and setup memory 	-

Typical damping for a given environment (reflective medium)

FLUID		GRANULAR		DUST	
	Typical attenuation [dB]		Typical attenuation [dB]		Typical attenuation [dB]
Calm surface 	0	Hard, porous 	40	Low dust 	about 5
Wavy surface 	from 5 up to 10	Soft with strong damping (e.g. peat) 	from 40 up to 60	Large dust 	from 5 up to 20
Strong turbulence (agitators, etc.) 	from 10 up to 20				

▷ APPLICATION EXAMPLE

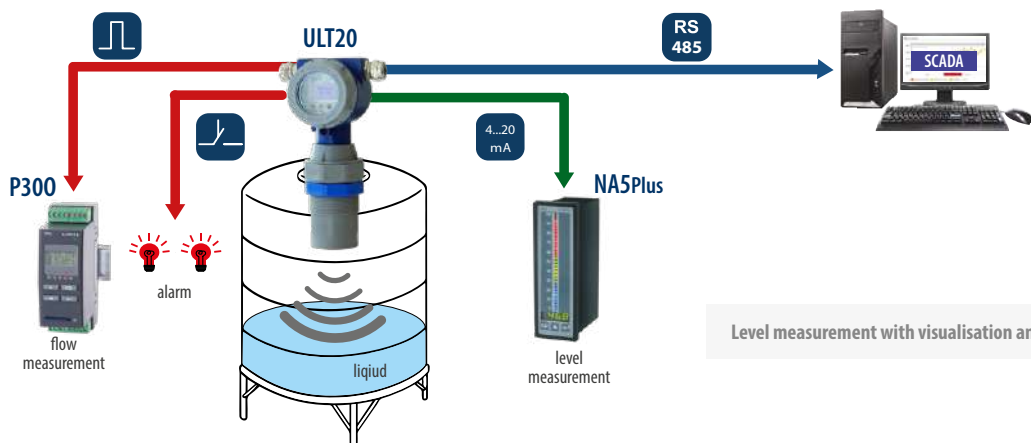

Level measurement with visualisation and recording.

TEMPERATURE CONTROLLERS

TEMPERATURE & PROCESS CONTROL

INDUSTRIAL PROCESS CONTROLLERS



	RE11	RE22	RE71	RE81	RE72	RE82	RE92
Number of channels	1	1	1	1	1	1	2
Input	programmable Pt100, J, T, K, S, R	programmable Pt100/1000 J, T, K, S, R, B, E, N, L or 0/4...20 mA, 0...5/10V	fixed Pt100 J, K, S		programmable Pt100/1000 J, T, K, S, R, B, E, N, L 0/4...20 mA 0...5/10V		programmable 2 x Pt100/500/1000, Ni100, Cu100 J, T, K, S, R, B, E, N, L 0/4...20 mA 0...5/10V 2 x digital input (RS-485 Modbus Master)
Additional input	-	-	-	-	logic/ current transformer input/ 0/4... 20 mA (option)	2 x logic/ current transformer input/ 0/4...20 mA	3x logic and 0/4...20 mA / 0...5/10 V / potentiometer (100)1000 Ω (option) 3 x binary input interface
Output	1 x relay/ logic 0/12V 1 x relay	relay or logic 0/5 V	relays or logic 0/6 V	2 x relays or 1 x relay + 1 x logic 0/6 V	2 or 3 x relays / logic 0/5 V / analog 0/4...20mA / 0...10 V / supplying output 24 V d.c. 30 mA - option	2 x relays and 2 x relays / logic 0/5V / analog 0/4...20 mA / 0...10 V (option) supplying output 24V d.c. 30mA- option	max. 6 x relays / 2x logic / 2 x analog 0(4)... 20 mA / 0...10 V (option) supplying output 24 V d.c. 30 mA - option
Interface	-	-	-	-	RS-485 Modbus		2 x RS-485 (Modbus Slave & Master), Ethernet - option
Alarm	1	-	-	1	max. 2	max. 3	max. 6
Control	on/ off or PID with self-tuning, heating or cooling						
	-	-	-	-	step-by-step		
	-	-	-	-	programmed		
Display	white and green LED 4+4 digits (15.3 mm / 8 mm)	red LED 4 digits (9.2 mm)	red LED 4 digits (7,6 mm)	red and green LED 2 x 4 digits (7,6 mm)		red and green LED 2 x 4 digits (7,6 mm) + 2 bargraphs	colour LCD 3.5" TFT 320 x 240 pixels
Supply voltage	85...270 V a.c./d.c.	230 V a.c.	230 V a.c.		85...253 V a.c./ d.c. or 20...40 V a.c./d.c.		85...253 V a.c./d.c.
Protection rating	IP50	IP65					
External dimensions	52x52x76 mm	48 x 48 x 93 mm	48x48x93 mm	48x96x93 mm	48 x 48 x 93 mm	48 x 96 x 93 mm	96 x 96 x 91 mm
Programming	-	using buttons	using buttons or free eCon software (using PD14 programmer)		using buttons or free eCon software using RS-485		using buttons or free eCon software using RS-485 or Ethernet
Additional functions	-	• soft start	-		• soft start	• 6 types of alarms	• alarm LATCH function
	-	-	-		• profile control (15 programs with 15 segments in each)	• parameter logging on SD card • FTP and WEB server - option • profile control (20 programs with 15 segments in each)	

TEMPERATURE CONTROLLERS & LIMITERS

TEMPERATURE & PROCESS CONTROL





INDUSTRIAL PROCESS CONTROLLERS

TEMPERATURE LIMITER



	RE55	RE60	RE62	RE01	RL10
Number of channels	1	1	1	1	1
Input	fixed Pt100 J, K, S	fixed Pt100 J, K, S	programmable Pt100 J, K ± 20 mA, ± 10 V, ± 60 mV	fixed Pt100, Pt1000 NTC	programmable Pt100/1000 J, T, K, S, R, B, N
Additional input	-	-	-	logic	-
Output	2 x relay or 1 x logic 0/5 V + 1 x relay	1 x relay or 1 x logic 0/5 V or 2 x relay - option	max 3 x relay or 2 x relay and 1 x analog supply 24 V d.c. - option	2 x relay (1 x NOC 10 A/230 V, 1 x NO 5 A/230 V)	relay
Interface	-	-	RS-485 (option)	-	RS-485
Alarm	1	max 2 - option	max 3	max 2	-
Control	on/off, PID, heating or cooling				on/off
Display	green LED 4 digits (10 mm)	LCD (2 x 8 characters)	OLED 128 x 64 pixel, amber color	red LED 4 digits (14 mm)	red LED 4 digits (9.2 mm)
Supply voltage	85... 253 V d.c./a.c.	24 or 110 or 230 V a.c. or 18...72 V d.c.	22...60 V a.c. / 20...60 V d.c. (terminals 11-12) or 60...253 V a.c. / 60...300 V d.c. (terminals 10-11)	230 V a.c.	230 V a.c.
Protection rating	IP40		IP30	IP65	
External dimensions	96 x 96 x 65 mm	45 x 100 x 120 mm	53 x 110 x 60.5 mm	76 x 34 x 80 mm	48 x 48 x 93 mm
Programming	using buttons		using buttons or free eCon software using RS-485	using buttons or free eCon software (using PD14 programmer)	using buttons or free eCon software using RS-485
Remarks	-			defrost function with programmable automatic or manual mode	meets the requirements of EN 60519-2 for class 2 (Safety in electroheat installations)

▷ APPLICATION EXAMPLE

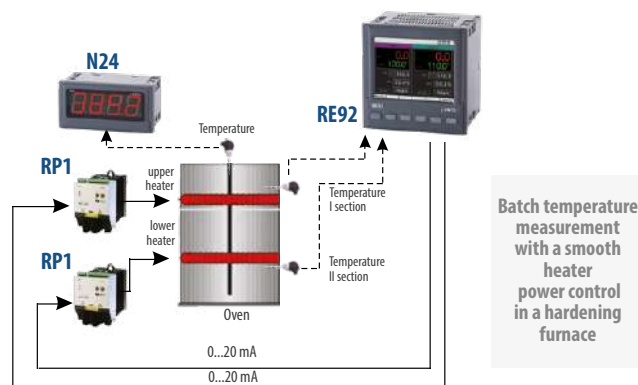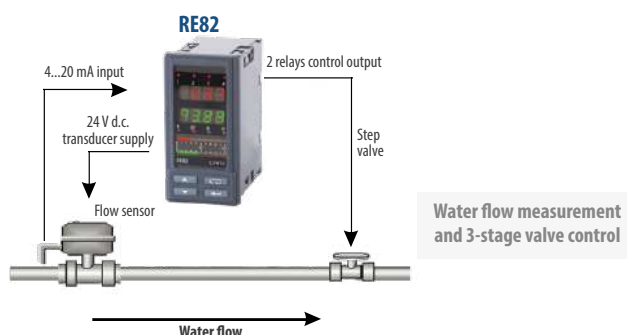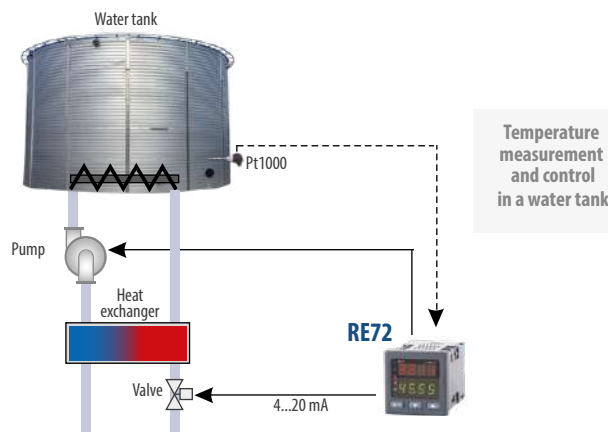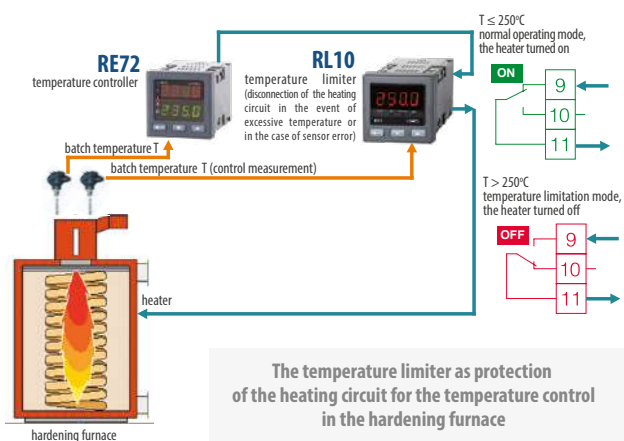

CONTROLLER FOR INJECTION MOULDS

TEMPERATURE & PROCESS CONTROL

SYSTEM FOR INJECTION MOULDS WITH HEATED CHANNELS



SR11

Number of channels	1...8
Input	fixed Fe-CuNi (J) logic 24V d.c.
Output	1 output per control zone (15 A)
Control	Fuzzy Logic, PID with self-tuning
Interface	RS-485 with Modbus protocol (option)
Display	LED 14 mm 2 x 3 digits
Supply voltage	230 V a.c. (for system with 1 control zone) 3 x 230/ 400 V a.c. (for system with 2...8 control zones)
Protection rating	IP30
External dimensions	77.5 x 200 x 355 mm (1 control zone) 215 x 197 x 355 mm (2 or 3 control zones) 365 x 197 x 355 mm (4, 5 or 6 control zones) 465 x 197 x 355 mm (7 or 8 control zones)
Additional functions	<ul style="list-style-type: none"> Fuzzy Logic algorithm ensures a high accuracy temperature control and optimal energy consumption soft-start function and leakage current monitoring ensure prolonged heaters reliability and operation safety for users during a break in system operation, a decreased temperature is maintained, what ensures a fast restart of the system <ul style="list-style-type: none"> damage detection: <ul style="list-style-type: none"> - too high heater leakage current, - damage of the load circuit, - short-circuit, break or inverse polarization in the sensor circuit.

POWER CONTROLLERS

PROCESS CONTROL



RP7



RP1



RPL1



RP3

Version		1-phase		3-phase
Control	phase	phase, pulse, on/off		
Input signal		0..5/10V, 0/4..20mA potentiometer		
Output	-	2 x relays		
Output current	5-15 A	25-125 A		3 x 40-450 A
Load supply voltage	230 V	230 V, 400 V a.c.	230, 400, 500 V a.c.	400 V a.c.
Load configuration	2-wire	2 or 3-wire		3, 4 or 6-wire
External dimensions	50 x 105 x 105 mm	135 x 201 x 199 mm 135 x 231 x 199 mm	135 x 201 x 199 mm 135 x 231 x 199 mm - RPL1-x4xx (version with fan)	212 x 318 x 177 mm (40, 70, 125 A versions) 383 x 433 x 281 mm (200, 300, 450 A versions)



NEW




SOON



	SM61IoT	KD6	KD7	KD8	KD10
Number of channels	up to 2500	up to 60 logical channels (max. 8 universal analog channels)	up to 24 channels (max. 12 analog channels and/or max. 24 digital channels)	up to 6	up to 52 logical channels (max. 18 analog channels + 2 temperature channels and max. 32 digital channels)
Input	Port II: Modbus RTU Master, (100 groups 25 registers each) 2 x logic (option)	programmable (0, 4 or 8 inputs) Pt100/500/1000, J, K, N, E, R, S, T, B, ± 40 mA ± 300 mV 0...4000 Ω ± 10 V	programmable (3, 6, 9 or 12 inputs) Pt100/500/1000, Ni100, Cu100, J, K, N, E, R, S, T, B, L, ± 20mA ± 9999mV 50...2000 Ω 0...2000 Ω	programmable (3 or 6 inputs) Pt100/500/1000 Ni100, Cu100, J, K, N, E, R, S, T, B, L, ± 20mA ± 9999mV 50...2000 Ω 0...2000 Ω	programmable (6, 12 or 18 inputs) Pt100/1000, J, K, N, E, R, S, ± 20mA, 4...20mA, ± 10V, ± 60, 150, 300 mV, 0...400, 4000 Ω
		logic input 0/5...24 V d.c. (2, 6 or 10 pcs.)	logic input 0/5...24 V d.c. (8 or 16 pcs.)	logic 0/5...24 V d.c. (4 or 8 pcs.)	dedicated: 2x Pt100/1000/5k Ω 4 or 6 binary (option)
		Modbus RTU Master (10 x 10 registers)	Modbus RTU Master (24 registers)	-	
Output	Port I: Modbus RTU/TCP Slave, 2 x relays (option)	relays (2, 6, 8, 10 or 14) analog 0/4...20 mA (0, 4 or 8) 1 x supplying output 24 V d.c. 30 mA	relays (8 or 16) relays OptoMOS (8 or 16) analog (4 or 8) 0...5, 0/4...20 mA 0...5 V, 1...5 V, 0...10 V supplying output (2 x 24 V d.c. 30 mA)	relays (6 or 12)	optional: relays (4 or 8) analog 0/4...20 mA (3 or 6)
Interface	2 x RS-485 (Modbus Slave i Master) 1 x RS-232 (Modbus Slave) USB Device 1.1. Ethernet 10/100 Base-T Modbus TCP/IP 	2 x RS-485 (Modbus Slave & Master) 1 x USB Host 2.0 1 x Ethernet (Modbus TCP/IP, WWW, FTP, NTP, DHCP)	2 x RS-485 (Modbus Slave and Master) 1 x RS-232 (Modbus Slave) USB Device 1.1. Ethernet 10 Base-T	RS-485 (Modbus Slave) USB Device 1.1.	1x RS-485 Modbus Slave 1x RS-485 Modbus Master (option) USB Device & Host Ethernet 10/100 Base-T Modbus TCP (Master, Slave)
Memory	8 GB	internal 8 GB	internal – up to 6 MB external – CF card up to 4 GB		internal – 20 MB external – karta SD to 32 GB
Display	-	colour LCD 3.5" TFT type, 320 x 240 pixels	LCD 5.7" TFT type 320 x 240 pixels with touch panel		LCD 5.6" TFT type 640 x 480 pixels with touch panel
Supply voltage	85...253 V a.c., 90...300 V d.c. or 20...40V a.c., 20...60V d.c. or 10...16V a.c., 10...20V d.c.	85...253 V a.c., 90...300 V d.c. or 20...60 V d.c.	90...253 V a.c., 90...300 V d.c. or 18...30 V d.c.		85...253 V a.c. / 90...300 V d.c.
Protecting rating	IP40/IP20		IP65		IP54
External dimensions	45 x 120 x 100 mm	96 x 96 x 77 mm	144 x 144 x 171 mm	144 x 144 x 171 mm	144 x 144 x 104 mm
Additional functions	<ul style="list-style-type: none"> HTTP (WEB server – visualization in format of synoptic maps), DHCP FTP Server, RTC 	<ul style="list-style-type: none"> many forms of data presentation: linear, bargraph, chart, digital and analog indicators, WWW and FTP Server (KD6, KD7) 	<ul style="list-style-type: none"> Windows® CE operating system PC software: KD SETUP, KD CHECK, KD CONNECT, KD ARCHIVE user access levels menu available in 8 language versions 	<ul style="list-style-type: none"> WWW, FTP server visualisation of measurements in the form of: digital, analogue meters, graphs, bargraphs PC software user access levels 	





Access to the device from anywhere in the world thanks to the built-in web server.

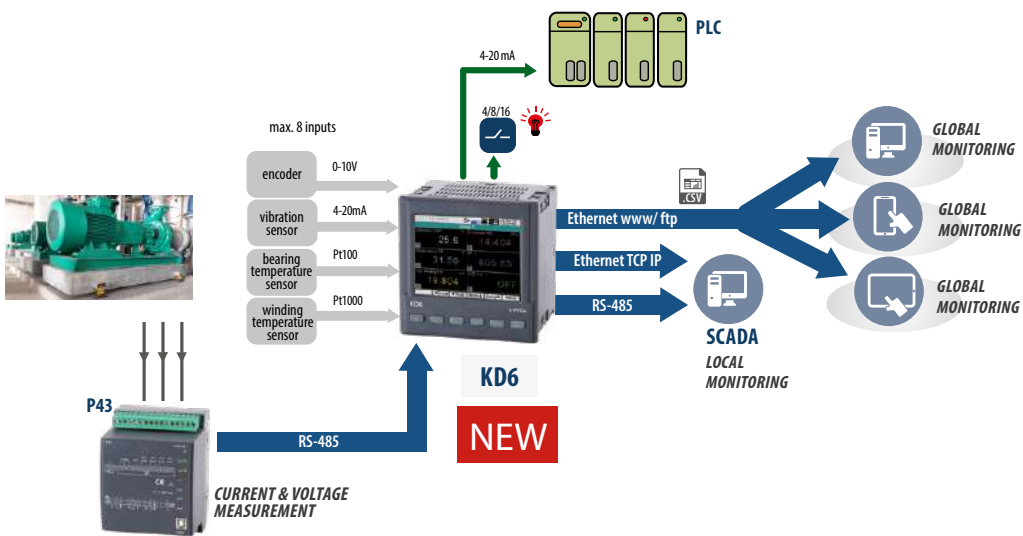

Monitoring of engine parameters.

Temperature measurement, logging and alarming.

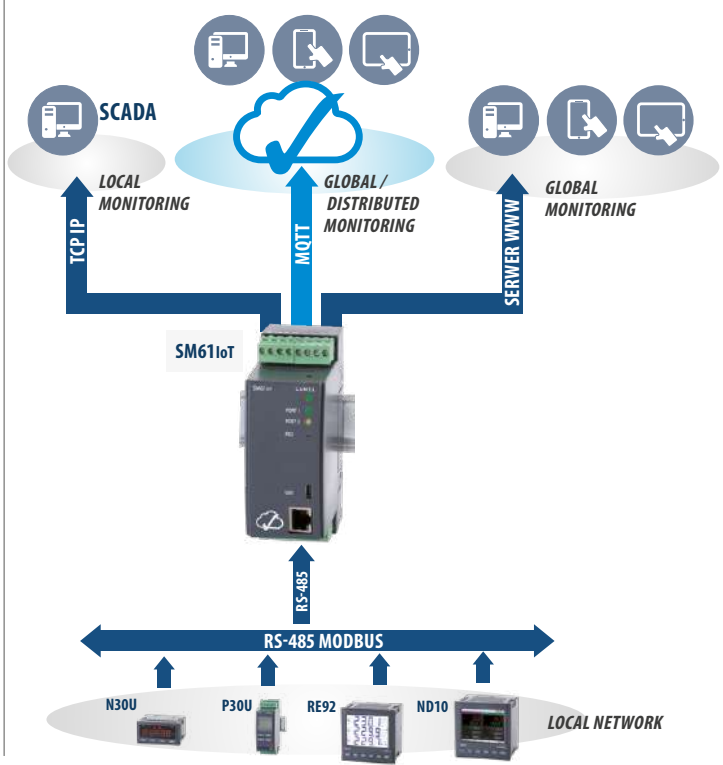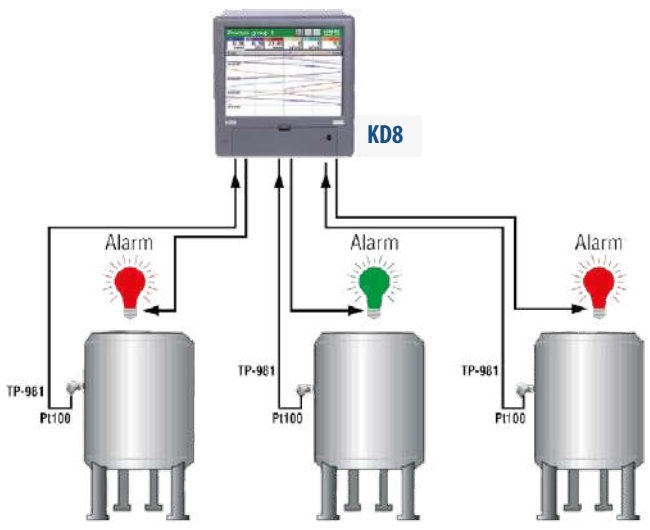

I/O MODULES, COMMUNICATION MODULES

COMMUNICATION

INPUT/OUTPUT MODULES



	SM1	SM2	SM3	SM5	SM4	S4AI	S4AO	
Number of channels	2	4	2	8	4 or 8	4	4	
Inputs/outputs	fixed inputs: Pt100(-200...850°C), 0...400 Ω or 0/4...20 mA or 0...10 V		programmable inputs: logic on/off or pulse counter up to 1 kHz 0...4 294 967 295 pulses		fixed inputs: logic on/off	fixed outputs: 4 x relay or 8 x OC	programmable inputs: 4 x ± 10 V, ± 20 mA or 4 x Pt100, Pt500, Pt1000 J, k, S, ± 150 mV	fixed outputs: 4 x 0/4...20 mA or 4 x 0...10 V or 2 x 0/4...20 mA + 2 x 0...10 V
Interface	RS-485 Modbus Slave, RS-232 for configuration					RS-485 Modbus (Slave), USB for configuration	2 x RS-485 Modbus (Slave, Master) USB for configuration	
Baud rate	2400; 4800; 9600; 19.2 k; 38.4 k; 57.6 k; 115.2 k bit/s					1200; 2400; 4800; 9600; 19.2 k, 38.4 k, 57.6 k, 115.2 k bit/s		
Supply voltage	85...253 V a.c./d.c.; 20...50 V a.c./d.c.					85...253 V a.c./ 90...300 V d.c. 20...40 V a.c./ 20...60 V d.c.		
Protection rating	IP40							
External dimensions	22.5 x 120 x 100 mm	45 x 120 x 100 mm	22.5 x 120 x 100 mm	45 x 120 x 100 mm	45 x 120 x 100 mm	53 x 110 x 60 mm		


DATA LOGGERS



SM61IoT

Number of channels	up 2500 digital channels
Input	Port II: Modbus RTU Master (100 groups 25 registers each), 2 x logic
Output	Port I: Modbus RTU/TCP Slave, 2 x relay
Interface	2 x RS-485 (Modbus Slave and Master) 1 x RS-232 (Modbus Slave) USB Device 1.1. Ethernet 10/100 Base-T Modbus TCP/IP, MQTT
Memory	8 GB
Supply voltage	85...253 V a.c./ 90...300 V d.c. or 20...40 V a.c./ 20...60 V d.c. or 10...16 V a.c./ 10...20 V d.c.
Protection rating	IP40
External dimensions	45 x 120 x 100 mm
Additional functions	<ul style="list-style-type: none"> • HTTP (web server - visualization in format of synoptic maps), <ul style="list-style-type: none"> • DHCP, • FTP server, • RTC

APPLICATION EXAMPLE

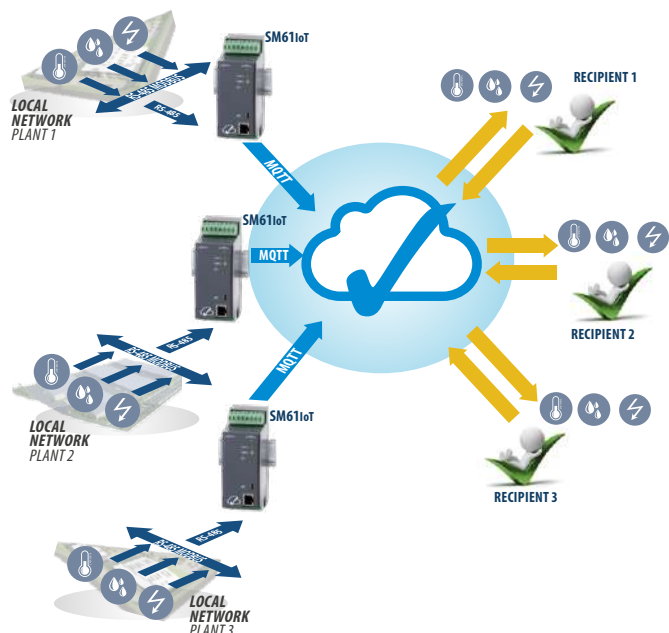

PROTOCOL/INTERFACE CONVERTERS

COMMUNICATION

NEW

TIME & PROTECTION RELAYS

CONTROL

PROTOCOL/INTERFACE CONVERTERS



	PD51	PD9	PD9W	PD20
Interface 1	RS-232	RS-485, RS-232		RS-485
Interface 2	RS-485	Ethernet RJ45	Wi-Fi, Ethernet	USB
Baud rate	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 [bit/s]	600 ÷ 460800 bit/s	300 ÷ 230400 bit/s	up to 115.2 kbps
Supply voltage	7...35V d.c. or 20...24...40V a.c./d.c. or 85...230...253V a.c./d.c.	5 ÷ 36 V d.c.		5V d.c., supplied from USB port
Protection rating frontal	IP40	IP30		IP40
External dimensions	22.5 x 120 x 100 mm	45 x 120 x 100 mm	86 x 82.5 x 25 mm	76 x 25 x 20 mm
Additional functions	<ul style="list-style-type: none"> converter/repeater galvanic isolation 	<ul style="list-style-type: none"> galvanic isolation Digi RealPort®, TCP/IP, HTTP, ICMP, DHCP, ARP Modbus TCP 	<ul style="list-style-type: none"> Wi-Fi 2.4GHz 802.11 b/g/n programming through www TCP/IP, HTTP, ICMP, DHCP, ARP Modbus TCP, RTU 	<ul style="list-style-type: none"> galvanic isolation compatible with industrial communication protocols

MULTIFUNCTIONAL PROTECTION RELAY



	LTR10	LP10-V
Type	multifunctional - 10 time functions	voltage protection relay
Number and type of contact	2 CO - changeover	1 x CO, 2 x CO (option)
Number of time ranges	10 time ranges	N/A
Resistive load	5A / 250 V AC	
Supply voltage	12...240 V AC/DC	= monitored voltage
External dimensions	91 x 17.5 x 65.4 mm	90 x 18 x 66.5 mm

POWER SUPPLIES

CONTROL




	ZS20-1P	ZS20-1K	ZS20-1L	ZS20-1A	ZS20-1B	ZS20-1C
Rating	24V / 0.63 A	24V / 1.5 A	24V / 1.75 A	24V / 2.5A	24V / 5A	24V / 7.5A
Power	15 W	36W	45W	60W	95 ... 120 W	120 ... 180 W
Input voltage range AC	85 ... 264 VAC					
Input voltage range DC	120 ... 370 VDC			125 ... 350 VDC		
Protection rating	IP20					
External dimensions	18 x 90 x 62 mm	54 x 90 x 62 mm	54 x 90 x 62 mm	54 x 90 x 62 mm	55 x 110 x 105 mm	55 x 110 x 105 mm

eCON - FREE SOFTWARE FOR CONFIGURATION OF LUMEL PRODUCTS

SOFTWARE TOOL

- Easy configuration of Lumel products
- Upload / download full configuration of a device connected to a PC computer using RS-485, Ethernet, USB or PD14 programmer (USB)
- Full device configuration can be saved to a file and stored on a PC computer for later use
- Firmware update for Lumel products
- Work over the web browser

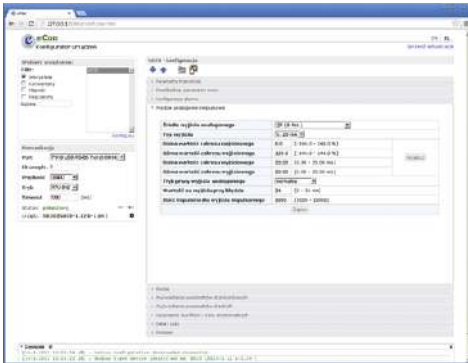



NEW

PD20 – USB/RS485 interface industrial converter



NEW

PD24 – converter of USB/RS232 (TTL) interface and to programmer for LUMEL products to configure settings using the free eCon software.



PD14 – programmer to configure non RS-485 devices using eCon

LUMEL SCANNER

SOFTWARE TOOL

How many times have you searched for the IP address of a device that is connected to the network you manage?. If Lumel devices work in it and you have access to a local WiFi network, the problem will be solved by the free Lumel Scanner application.

Just open it on your smartphone and the devices working in a given network will be automatically tracked. Thanks to the application you will get an overview of measured parameters and access to the device's website. Additionally, to facilitate localization, you can define the name of each device according to your needs.


The application also allows you to connect devices from outside the local network, as long as you know their IP address.

The application works in Android – from version 5.1.

It supports the following devices:

- temperature and humidity data logger - HT20, HT20IoT,
- environmental parameters data logger - HT22IoT,
- power network meters - ND30, ND30IoT, NR30, NR30IoT,
- transducers - P30H, P300, P30U, P30P

The application works in Android – from version 5.1. It can be downloaded from Google Play.

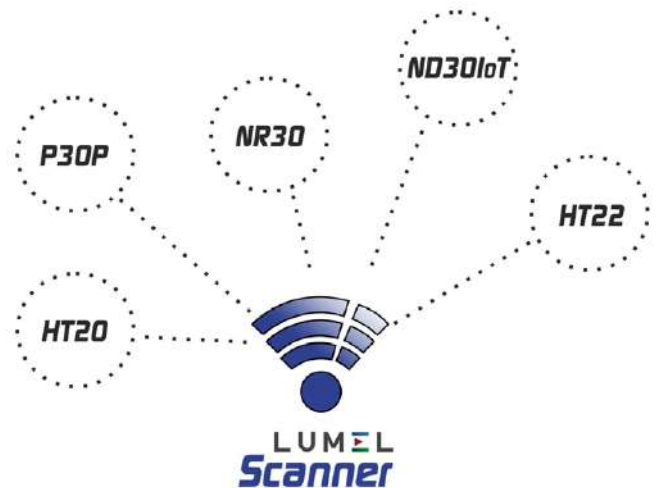

ANALOG PANEL METERS / SCALE 90°

ANALOG MEASUREMENT

MOVING-IRON METERS



EB16



EA16



EA17



EA19



EA12

	EB16	EA16	EA17	EA19	EA12
Type of scale	90°				
External dimensions	45 x 85 mm	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	-	✓*	✓*	✓*	-
Measuring ranges:	100 mA ... 25 A xA x/5 A; xA/1 A		100 mA ... 100 A xA x/5 A; xA x/1A		
- current: · direct · through a transformer* (on request, with twice or six-times overload)	6 V ... 600 V xV/100 V; xV/110 V		6 V ... 1000 V xV/ 100 V; xV/110 V		
- voltage: · direct · through a transformer	3 kV	2 kV	3 kV		
Proof voltage	3 kV		2 kV		
Frequency of measured value	40...45...65...72 Hz				
Protection rating	IP52	IP52 (on request IP65)			IP52
Climate version	normal or tropical		normal, tropical or similar to marine		
Class	1				

* for current measurement up to ranges: 1 A, 1/2 A, 5 A, 5/10A), for voltage measurement - all ranges

** see our current transformers (page 30)

MOVING-IRON METERS



MA16(P)



MA17(P)



MA19(P)



MA12(P)

	MA16(P)	MA17(P)	MA19(P)	MA12(P)
Type of scale	90°			
External dimensions	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	-	✓	✓	✓
Measuring ranges (direct):	400 µA...1 A (30...1000...10 000 Hz)		400 µA...1 A (30...1000...10 000 Hz)	
- current:	1...750 mA (40...1000 Hz)	1 A...6 A (49...50...51 Hz)	1 A...6 A (49...50...51 Hz)	
- voltage:	100...600 V (40...10 000 Hz)	60 mV...1.5 V (49...50...51 Hz)	2.5 V...600 V (30...1000...10 000 Hz)	
		2.5V...600V (30...1000...10 000 Hz)		
Proof voltage	2 kV			
Protection rating	IP52	IP52 (on request IP65)		IP52
Climate version	normal	normal, tropical or similar to marine		
Class	1			

3-PHASE VOLTMETERS



EP27



EP29

	EP27	EP29
Type of scale	90°	
External dimensions	72 x 72 mm	96 x 96 mm
Interchangeable scale	✓	✓
Voltage measuring ranges:	500 V xV/100 V; xV/110 V	
- direct phase-to-phase: - through a transformer:	40...45...65...72 Hz	
Frequency	3 kV	
Proof voltage	IP40	
Protection rating	normal	
Climate version	1.5	
Class		

POWER METER



PA39

	PA39
Type of scale	90°
External dimensions	96 x 96 mm
Interchangeable scale	✓
Power measuring ranges	50W... 1000 MW or 50 var... 1000 Mvar
Frequency	50 Hz, 60 Hz or 400 Hz
Proof voltage	2 kV
Protection rating	IP52 (on request IP65)
Climate version	normal, tropical or similar to marine
Class	1.5

ANALOG PANEL METERS / SCALE 90°

ANALOG MEASUREMENT

MOVING-COIL METERS



	MB16	MA16	MA17	MA19	MA12
Type of scale			90°		
External dimensions	45 x 85 mm	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	-	✓	✓	✓	-
Measuring ranges:					
- current:					
· direct measurement		100 μ A...6 A (MB16);		100 μ A...25 A	
· indirect measurement (through the shunt*)		100 μ A...25 A (MA16)		1 A...15 kA	
- voltage:					
· direct measurement		60 mV...600 V		60 mV...1000 V	
Proof voltage		3 kV		2 kV	
Protection rating	IP52		IP52 (on request IP65)		IP52
Climate version		normal or tropical		normal, tropical or similar to marine	
Rated operational conditions:					
- ambient temperature			5...23...55°C		
- relative air humidity			25...85%		
Class			1		

* see our shunts (page 33)

MAX DEMAND AMMETERS - BIMETALIC OR BIMETALIC AND MOVING-IRON



	BA27	BA39	BE27	BE39
Type of scale			90°	
External dimensions	72 x 72 mm	96 x 96 mm	72 x 72 mm	96 x 96 mm
Interchangeable scale	✓	✓	✓	✓
Measuring ranges:				
- bimetalic element:				
· direct measurement		0...1.2 A or 0...6 A		0...1.2 A or 0...6 A
· indirect measurement (through a transformers*)		0...1.2(x) A x/1 A or 0...1.2(x) A x/5 A		1.2(x) A x/1 A or 1.2(x) A x/5 A
- moving-iron element:				
· direct measurement		-		0...1/2 A or 0...5/10 A
· indirect (through a transformer*)		-		0...2(x) A x/1 A or 0...2(x) A x/5 A
Proof voltage			3 kV	
Protection rating			IP40 (on request IP65)	
Climate version			normal or tropical	
Class		3		3 (1.5)

* see our current transformers (page 30)

POWER FACTOR AND FREQUENCY METERS







	FA39	FA32	CA36	CA37	CA39	CA32
Type of scale						
External dimensions	96 x 96 mm	144 x 144 mm	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	✓	✓	✓	✓	✓
Measuring ranges						
	0.5 _{Cap} ...1...0.5 _{IND}					
	0.8 _{Cap} ...1...0.2 _{IND}					
	0.85 _{Cap} ...1...0.85 _{IND}					
	0 _{IND} ...1					
	45...50...60...65 Hz					
Frequency						
Proof voltage			2 kV			
Protection rating	IP52 (IP65 on request)	IP52	IP52	IP52 (IP65 on request)		IP52
Climate version			normal, tropical or similar to marine			
Class	1.5			0.5		





ANALOG PANEL METERS / SCALE 240°

ANALOG MEASUREMENT





MOVING-COIL METERS

	 MA16L	 MA17L	 MA19L	 MA12L
Type of scale	240°			
External dimensions	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	✓	✓	✓
Measuring ranges:				
- current:	100 μ A...60 A			
- voltage:	60 mV...600 V			
Proof voltage	2 kV	3 kV		
Protection rating	IP52 (IP65 on request)			IP52
Climate version	normal			
Rated operational conditions:				
- ambient temperature	5...23...55°C			
- relative air humidity	25...85%			
Class	1			

MOVING-IRON METERS

	 MA16L(P)	 MA17L(P)	 MA19L(P)	 MA12L(P)
Type of scale	240°			
External dimensions	48 x 48 mm	72 x 72 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	-	-	-	-
Measuring ranges:				
- current:	100 mA, 1 A 5 A, 10 A			
- voltage:	40 V...600 V			
Proof voltage	2 kV			
Protection rating	IP52 (IP65 on request)			IP52
Climate version	normal			
Class	1			

POWER FACTOR AND FREQUENCY METERS

	 FA39L	 FA32L	 CA39L	 CA32L
Type of scale	240°			
External dimensions	96 x 96 mm	144 x 144 mm	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	✓	✓	✓
Measuring ranges	0.5 _{Cap} ...1...0.5 _{IND} 0.8 _{Cap} ...1...0.3 _{IND} 0.8 _{Cap} ...1...0.8 _{IND}		45...50...55Hz 45...55...65Hz 55...60...65Hz	
Frequency	49...51 Hz (1-phase) 45...65 Hz (3-phase)		360...400...440Hz 380...400...420Hz	
Proof voltage	2 kV			
Protection rating	IP52 (IP65 on request)	IP52	IP52 (IP65 on request)	IP52
Climate version	normal			
Class	0.5			

ANALOG PANEL METERS / SCALE 240°

ANALOG MEASUREMENT

POWER METER



PA39L



PA32L

	PA39L	PA32L
Type of scale	240°	
External dimensions	96 x 96 mm	144 x 144 mm
Interchangeable scale	✓	
Power measuring ranges	50 W...1000 MW or 50 var...1000 Mvar	
Frequency	50 Hz, 60 Hz or 400 Hz	
Proof voltage	2 kV	
Protection rating	IP52 (on request IP65)	IP52
Climate version	normal	
Class	1.5	

DUAL ANALOG PANEL METERS / 2 IN 1 / SCALE 90°

MEASUREMENT

DUAL MOVING-IRON METERS



EA19D

DUAL FREQUENCY METERS



CA39D

CA32D

DUAL MOVING-COIL METERS



MA19D

	EA19D	CA39D	CA32D	MA19D
Type of scale	90°			
External dimensions	96 x 96 mm	96 x 96 mm	144 x 144 mm	96 x 96 mm
Interchangeable scale	✓			
Measuring ranges	150...600 V; xV/100V ; xV/110V 4...60 A; xA x/5A; xA/1A	45.....50.....55 Hz 45.....55.....65 Hz 55.....60.....65 Hz 360...400...440 Hz 380...400...420 Hz		1000 μ A...30 A 60 mV...600 V 40 mV...1000 V
Proof voltage	3 kV	2 kV		3 kV
Parameters of measured signal	45...65 Hz	-		-
Protection rating	IP52 (on request IP65)	IP52 (on request IP65 - only for CA39D)		IP52 (on request IP65)
Climate version	normal			
Class	1	0.5		1

CURRENT TRANSFORMERS

ANALOG MEASUREMENT



LCTM series

LCTM CURRENT TRANSFORMERS WITH A PRIMARY WINDING

	LCTM 62/W (40)	LCTM 74W (45)
Primary current [A]	1...30	1...60
External dimensions	40 x 62 mm	45 x 74 mm
Accuracy class	0.2; 0.5; 1	



LCTR series

LCTR CURRENT TRANSFORMERS FOR A ROUND CONDUCTOR

	LCTR 45/14(40)	LCTR 50/14 (30)	LCTR 50/14 (50)	LCTR 62/R
Primary current[A]	30...300	40...300	30...300	50...600
Hole diameter	∅14	∅14	∅14	∅22
Accuracy class	0.5; 1; 3			0.2; 0.55; 0.5; 1; 3



LCTB 45

LCTB 62

LCTB CURRENT TRANSFORMERS FOR A BUSBAR CONDUCTOR

	LCTB 45/21 (40)	LCTB 50/21 (30)	LCTB 50/21 (50)	LCTB 62/20 (40)	LCTB 74/20 (45)	LCTB 50/30 (30)
Primary current [A]	50...400	50...400	50...400	50...400	30...400	75...600
Hole diameter	∅20	∅21	∅21	-	∅20	∅26
Busbar (mm)	20 x 10	20x10	20x10	20 x 12 2 x 15 x 6	20 x 10	30x10; 20x15 20x20 2x20x10
Accuracy class	0.5; 1; 3			0.25; 0.2; 0.55; 0.5; 1; 3		0.5; 1; 3



LCTB 74

LCTB 86

LCTB CURRENT TRANSFORMERS FOR A BUSBAR CONDUCTOR

	LCTB 50/30 (50)	LCTB 62/30 (40)	LCTB 62/30 (50)	LCTB 74/30 (45)	LCTB 62/40 (40)	LCTB 86/40 (45)
Primary current [A]	75...600	50...800	40...800	30...800	100...800	50...1000
Hole diameter	∅26	∅30	∅28	∅26	∅31	∅36
Busbar (mm)	30x10; 20x15; 20x20; 2x20x10	30x10 2x25x10	30x10 2x25x10	30x15 2x20x10	40x10 2x30x10	40x10 2x30x15
Accuracy class	0.5; 1; 3		0.25; 0.2; 0.55; 0.5; 1; 3			



LCTB 104

LCTB 86

LCTB CURRENT TRANSFORMERS FOR A BUSBAR CONDUCTOR

	LCTB 74/40 (45)	LCTB 74/50 (45)	LCTB 86/50 (45)	LCTB 86/60 (45)	LCTB 104/60 (45)	LCTB 104/80 (45)
Primary current [A]	40...1000	100...1000	100...1250	100...1600	100...1600	200...2000
Hole diameter	∅35	∅41	∅46	∅51	∅54	∅65
Busbar (mm)	40x12 2x30x15	50x12 2x40x10	50x12 2x40x15	60x12 2x50x15	60x12 2x50x15 2x40x20	80x12 2x60x15 2x50x25
Accuracy class	0.25; 0.2; 0.55; 0.5; 1; 3					



LCTB 140

LCTB 225

LCTB CURRENT TRANSFORMERS FOR A BUSBAR CONDUCTOR

	LCTB 140/80 (45)	LCTB 140/100H (45)	LCTB 225/125 (50)	LCTB 225/167 (50)
Primary current [A]	200...2000	200...4000	600...6000	1000...7500
Hole diameter	∅72	∅86	-	-
Busbar (mm)	80x30 2x60x25	100x30 2x80x25 2x70x30	124x93	166x65
Accuracy class	0.25; 0.2; 0.55; 0.5; 1; 3			

CURRENT TRANSFORMERS

ANALOG MEASUREMENT

LCTB CURRENT TRANSFORMERS FOR A BUSBAR CONDUCTOR

	LCTB 100/100V (45)	LCTB 140/100V (45)	LCTB 100/130V (45)	LCTB 140/130V (45)
Primary current [A]	400...2500	200...3000	400...3200	400...5000
Busbar (mm)	41 x 103	100x30 2x80x25 2x70x30	38 x 128	70 x 130
Accuracy class	0.25; 0.2; 0.5S; 0.5; 1; 3		0.2; 0.5; 1; 3	



NEW

NEW

LCTS SPLIT CORE CURRENT TRANSFORMERS

	LCTS 50/18SC	LCTS 50/32SC	LCTS 93/30SC (40)	LCTS 125/50SC (40)	LCTS 155/80SC (40)	LCTS 195/80SC (64)
Primary current [A]	150...250	250...500	100...400	250...1000	250...3000	500...5000
Hole dimensions (depth x width) [mm]	∅18.5	∅32.5	23 x 33	85 x 54	85 x 125	82 x 162
Accuracy class	1		0.5; 1			



LCTP 3-PHASE CURRENT TRANSFORMERS

	LCTP 75/15(60)	LCTP 105/21(40)	LCTP 140/31(40)	LCTP 185/27(45)	LCTP 185/37(45)
Primary current [A]	100...160	100...250	250...630	100...500	300...800
Hole diameter [mm]	-	-	-	∅27	∅37
Busbar (mm)	14 x 24	20 x 24	31 x 36	-	-
Accuracy class	0.5; 1			1	




LRC - RESIN CAST CURRENT TRANSFORMERS

	LRC1 80/30(50)	LRC2 90/50(40)	LRC3 110/72(40)	LRC4 135/85(40)
Primary current [A]	60 A...160	200 A...320	400 A...630	800 A...1250
Hole diameter [mm]	∅ 30	∅ 50	∅ 72	∅ 85
Accuracy class	0.5, 1			



LRC - RESIN CAST CURRENT TRANSFORMERS

	LRC5 165/115(40)	LRC6 195/130(40)	LRC7 230/165(40)	LRC8 295/200(40)
Primary current [A]	1500 A...2000	2500 A...3200	3000 A...3200	4000 A...5000
Hole diameter [mm]	∅ 115	∅ 130	∅ 165	∅ 200
Accuracy class	0.5, 1			



LU01 - SUMMATION CURRENT TRANSFORMERS

	LU01 (75)	LU01 (150)
Inputs [A]	2 x 5A...4 x 5A	5 x 5A...8 x 5A
Secondary current	5 A	5 A
Dimensions [mm]	70 x 75	70 x 150
Accuracy class	0.5; 1	



LW - ROUND CURRENT TRANSFORMERS

	LW01	LW02	LW03	LW04	LW05	LW06
Primary current [A]	50...200	50...200	75...300	120...600	200...1000	600...3200
Hole diameter [mm]	∅30	∅30	∅43	∅58	∅72	∅113
Outer diameter [mm]	∅73	∅73	∅92	∅100	∅110	∅159
Accuracy class	0,5; 1		0.2; 0.5S; 0.5; 1			



CURRENT TRANSFORMERS

ANALOG MEASUREMENT

LE - ROUND CURRENT TRANSFORMERS



	LE01 73/30 (50)	LE03 92/43 (41)	LE04 95/50 (40)	LE05 100/58 (41)
Primary current [A]	50...200	200...400	200...300	400..600
Hole diameter [mm]	∅30	∅43	∅50	∅58
Outer diameter [mm]	∅73	∅92	∅95	∅100
Accuracy class	1;5		1	

LE - ROUND CURRENT TRANSFORMERS



	LE06 110/72 (41)	LE07 135/85 (30)	LE08 159/113 (40)	LE09 165/130 (30)
Primary current [A]	800...1000	800...1200	1200...2000	2400...3000
Hole diameter [mm]	∅72	∅85	∅113	∅130
Outer diameter [mm]	∅110	∅135	∅159	∅165
Accuracy class			1	




CURRENT TRANSFORMERS DEDICATED TO ND20CT

	LJ12	LJ25, LJ35, LJ45	L306, L307, L308
Version	1-phase		3-phase
Range	50-250 A*	60-600 A*	63-250 A*
Class		1 or 0.5*	
Connection way to ND20CT		RJ12 connector	screw terminals

* - more detailed informations in data sheet

We offer: On customers request we offer transformer calibration certificates.

ACCESSORIES:

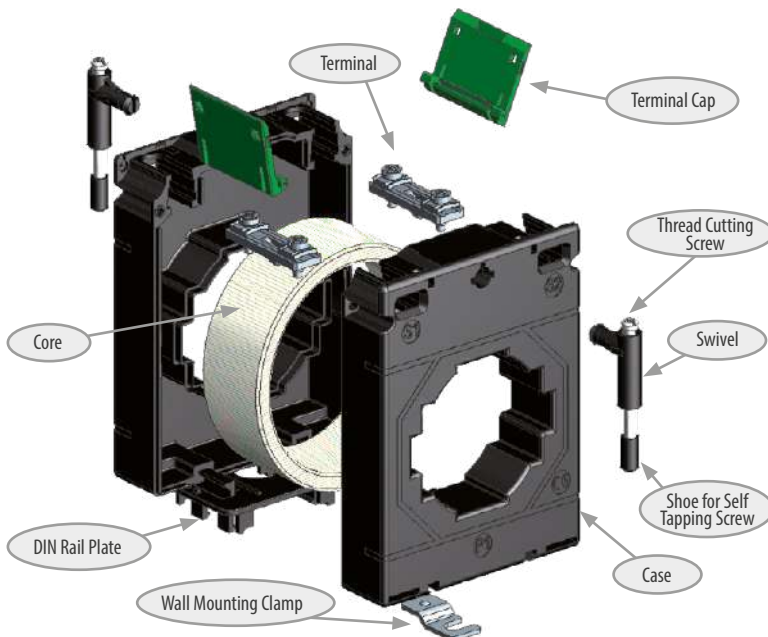

MORE INFORMATION IN OUR CATALOG:



SHUNTS / CLASS 0.2, 0.5

ANALOG MEASUREMENT



	B1	B2	B3	B4	B5	B6
Voltage drop	30 mV	60 mV	150 mV	50 mV	75 mV	100 mV
Rated current	1 A...15 kA (1; 1.5; 2.5; 4; 6 and their decimal multiples)					
Accuracy class	0.2 or 0.5					


- shunts from 1...25 A are fixed on insulating basis with the possibility to be mounted on a DIN rail (except B1 type)
 - shunts of other ranges are fixed directly on the DC rail or cable
 - dimensions acc. DIN 43703
 - shunts 40...150 A - insulating base as a option for B2 types
- on request additional chemical coating are available: varnishing or silver




BP4

Voltage drop	50 mV
Rated current	5 A...500 A
Accuracy class	0.5

- Custom-made executions are available on request (voltage drop, current).



Adapter **ATS1**



Adapter **ATS6**

ADAPTER FOR DIN RAIL TS35

- Designed for mounting of panel instruments on the DIN rail TS35.

	ADAPTER ATS					
	ATS1	ATS2	ATS3	ATS4	ATS5	ATS6
Hole dimensions (width x height) [mm]	92 ^{+0.8} x 92 ^{+0.8}	92 ^{+0.8} x 45 ^{+0.6}	68 ^{+0.7} x 68 ^{+0.7}	45 ^{+0.6} x 92 ^{+0.8}	45 ^{+0.6} x 45 ^{+0.6}	dedicated for transducers P18, P18D, P18L
Panel instruments dimensions (width x height) [mm]	96 x 96	96 x 48	72 x 72	48 x 96	48 x 48	

ENLARGING FRAME

- Designed to reduce the mounting hole from 96 x 96 mm to 48 x 96 mm or 96 x 48 mm.
- Ordering code:** CZ/20-810-01-00004



CAM SWITCHES

ANALOG MEASUREMENT



PKT1 / PKS1 / PKH1
changeover



PKT2 / PKS2 / PKH2
multi-step



PKT3 / PKS3 / PKH3
isolator



PKT4
selector

PARAMETERS	UNIT	PKT1, PKT2, PKT3, PKT4				PKS1, PKS2, PKS3				PKH1, PKH2, PKH3	
		6 A	10 A	16 A	20 A	25 A	32 A	40 A	63 A	100 A	200A
Rated operational voltage (Ue)	V	440	440	690	690	690	690	690	690	690	690
Rated Insulation voltage (Ui)	V	440	440	690	690	690	690	690	690	690	690
Rated uninteruptd current (Ith)	A	8	12	20	25	32	40	50	80	125	225
Rated short time withstand current (Icw)	A	72	120	192*	240*	300	384	480	756	1200	2400
Rated Impulse withstand voltage (Uimp)	kV	4	4	4	4	6	6	6	6	6	6
Rated Fuse short circuit current	kA	3	3	5	5	10	10	10	10	15	15
Frontal frame dimensions	mm	48 x 48				64 x 64				88 x 88	

* Rated short time withstand current (0.5s- current)



PKR1 / PKR5
ON-OFF spring return
switches



PKR2/PKR6
double throw with off



PKR3 / PKR7
spring return switches
without off



TKR1 / TKR2
spring return cam switches 1xNO 1xNC /
spring return cam switches 2xNO 2xNC

PARAMETERS	UNIT	PKR1, PKR2 PKR3, PKR5, PKR6, PKR7			TKR1, TKR2	
		16 A	20 A	25 A	32 A	
Rated operational voltage (Ue)	V	690	690	690	690	
Rated Insulation voltage (Ui)	V	690	690	690	690	
Rated uninteruptd current (Ith)	A	20	25	32	40	
Rated short time withstand current (Icw)	A	192*	300	300	384	
Rated Impulse withstand voltage (Uimp)	kV	4	6	6	6	
Rated Fuse short circuit current	kA	5	10	10	10	
Frontal frame dimensions	mm	48 x 48	64 x 64	65 x 65		

* Rated short time withstand current (0.5s- current)

RATED OPERATING CONDITIONS	
Frequency	50/60 Hz
Operating temperature	-25°C...60°C
Installation category	III
Protection grade	IP50 from frontal side IP20 from terminal side
Standards	IEC 60947-1, IEC 60947-3, IEC 60947-5
SWITCH LIFE	
Mechanical Life	100 000 operations at 300 cycles/hr
Electrical Life	10 000 operations at 100% rated duty at 120 cycles/hr



NP45

Portable power quality analyzer

- 5.6" TFT color screen. 640 x 480 pixel,
- waveform real-time display (4 voltages/4 currents),
- half cycle RMS measurement (voltage and current),
- measurement of TRMS currents up to 6000 A (with additional probes mode),
- measurement in 1-phase and 3-phase systems (3 - and 4-wire),
- measurement of voltage, current, harmonics, power, energy, inrush current, flicker and other,
- graphical presentation of data in a waveform and vector diagram,
- record of events: dips, swells, overvoltages,
- power quality according to EN-50160 standard or user-defined limit,
- registration of user-defined parameters in the 32GB internal memory (registration time from 2 h up to 1 year),
- Ethernet and WiFi interfaces for remote operation of the analyzer,
- USB Host to move archive data and screenshots to an external USB memory,
- safety standards: EN 61010-1. CAT III 1000V / CAT IV 600V



NP15

TRUE RMS digital multimeter with data logger & view function

- voltage measurement of AC, DC and AC / DC up to 1000V;
- current measurement of AC, DC and AC / DC up to 10A;
- low input impedance;
- measurement of TRMS effective;
- data logging & view function (up to 32000 readings);
- 100 kHz bandwidth for voltage measurement;
- resistance measurement;
- frequency and duty cycle measurement;
- temperature measurement with J, K, Pt100 & Pt1000 sensors;
- capacitance measurement;
- automatic / Manual measuring range selection;
- low-pass filter mode with a cutoff frequency of 1kHz;
- voltage noise measurement and suppression (dB);
- square wave signal generator;
- continuity test and diode test;
- function: Backlight, Relative / Zero, Auto Hold, Min / Max / Avg;
- acoustic signal indicating the overrange (Go / NoGo);
- information on dangerous voltage at the terminals;
- external power supply;
- fuse 16 A for all current measurement ranges to protect the device.



NP15B

TRUE RMS digital multimeter with data logger & view function

- voltage measurement of AC, DC and AC / DC up to 1000V;
- current measurement of AC, DC and AC / DC up to 10A;
- low input impedance;
- measurement of TRMS effective;
- data logging & view function (up to 32000 readings);
- 100 kHz bandwidth for voltage measurement;
- resistance measurement;
- frequency and duty cycle measurement;
- temperature measurement with J, K, Pt100 & Pt1000 sensors;
- capacitance measurement;
- automatic / Manual measuring range selection;
- low-pass filter mode with a cutoff frequency of 1kHz;
- voltage noise measurement and suppression (dB);
- square wave signal generator;
- continuity test and diode test;
- function: Backlight, Relative / Zero, Auto Hold, Min / Max / Avg;
- acoustic signal indicating the overrange (Go / NoGo);
- information on dangerous voltage at the terminals;
- external power supply;
- fuse 16 A for all current measurement ranges to protect the device.

 Bluetooth



NP10

Digital multimeter

- capacitance from 1pF...40.00 mF with zero correction;
- direct and alternating voltages from 100 μ V ... 1000 V;
- direct and alternating currents from 10 μ A ... 10.00 A;
- resistance from 100 m Ω ... 60.00 M Ω ;
- frequencies from 10.00 Hz ... 10 MHz;
- diode measurement and continuity testing;
- hold measurement- the value can be held and display simultaneously;
- relative measurement by pressing and holding PEAK and then pressing AUTO/MAN key;
- duty cycle (%) measurement;
- temperature measurement with 'K' type Thermocouple (NiCr - Ni) in the range from 0°C to 1300°C acc. to EN 60584;
- peak value measurement.



PORTABLE MULTIMETERS & CLAMP METERS



NP06

Digital multimeter

- direct and alternating voltages from 100 μ V ... 1000V,
- direct and alternating currents from 10 μ A ... 10.00A,
- resistance from 1 Ω ... 40.00M Ω with zero correction,
- resistance from 1pF... 200.00 μ A with zero correction,
- frequencies from 10.00 Hz ... 10MHz,
- diode measurement and continuity testing,
- duty cycle (%) measurement,
- hold measurement,
- relative measurement,
- non contact voltage detection.



NP08

Digital multimeter

- direct and alternating voltages from 100 μ V ... 1000V,
- direct and alternating currents from 10 μ A ... 10.00A,
- resistance from 1 Ω ... 40.00M Ω with zero correction,
- resistance from 1pF... 200.00 μ A with zero correction,
- frequencies from 10.00 Hz ... 10MHz,
- diode measurement and continuity testing,
- hold measurement
- relative measurement
- duty cycle (%) measurement,
- temperature measurement with 'K' type Thermocouple,
- backlit facility.



NC14

Power clamp-on meter

- AC & DC voltage measurement up to 1000 V;
- AC & DC current measurement in the range of 1000 A / 400 A;
- inrush/peak value measurement;
- active, reactive and apparent power measurement;
- power measurement in KM;
- energy consumption measurement in kWh;
- measurement up to 49th harmonics;
- phase angle measurement;
- THD measurement;
- DF measurement;
- crest factor /CF/ measurement;
- power factor /PF/ measurement;
- LPF mode.



NC12

Clamp-on meter

- current measurement up to 300 and 1000 A AC;
- measuring voltage up to 1000 V AC / DC;
- measuring temperature from -200 $^{\circ}$ C to 800 $^{\circ}$ C (Pt100 and Pt1000);
- the diameter of measured cable 50 mm (the meter up to 1000A);
- the diameter of measured cable 40 mm (the meter to 300A);
- illuminated digital display with analog indicator;
- a number of features:
 - HOLD - Stop function currently displayed measured value,
 - MIN, MAX - recording the minimum and maximum values measured;
- auto power off;
- an adjustment of the resistance or capacitance - for low measuring low resistance or capacitance, resistance wire or stray capacitance for a range of nF can be compensated by pressing the Shift;
- automatic and manual mode;
- available measuring function diodes and transistors;
- degree of protection IP20.



NC11

Clamp-on meter

- the diameter of measured cable 50 mm (the meter up to 1000A)
- the diameter of measured cable 40 mm (the meter to 400A)
- current measurement up to 400 and 1000 A AC
- measuring voltage up to 1000 V AC
- measuring temperature from 0 to 1300 $^{\circ}$ C (K type thermocouple)
- illuminated digital display with analog indicator,
- a number of features:
 - HOLD - Stop function currently displayed measured value,
 - Auto power off,
- for low ohm measurement, the lead resistance can be compensated by pressing the REL key,
- automatic and manual mode,
- available measuring function diodes and transistors,
- degree of protection IP20.
- an adjustment of the resistance - for low measuring low resistance or can be compensated by pressing the Shift button



NT10

Insulation meter

- insulation resistance measurement up to 3 G Ω ;
- measurement of DC and AC voltage in the range of 30 mV...1000V;
- measurement of DC and AC current in the range of 300 μ A...300 mA;
- resistance measurement 30 Ω ...30 M Ω ;
- capacity measurement 30 nF...30 μ F;
- frequency measurement 300 Hz...100 kHz;
- measuring the fill factor (%);
- HOLD Function;
- temperature measurement in the range of -200...800 $^{\circ}$ C / Pt100/ Pt1000;
- analog scale.



PORTABLE MULTIMETERS & CLAMP METERS

5 IN 1



VA19

5 in 1 Digital multimeter

- Measurements of AC / DC voltage, AC / DC current, resistance, frequency, load, capacitance and continuity, diode test.
- Sound Level function.
- Illumination measurement function (the meter uses a stable, long-life silicon diode).
- Temperature measurement.
- Humidity measurement.
- Automatic and manual measuring range function.
- Automatic switch-off function.
- Hold function.
- Relative measurement function.
- Backlight.
- Measurement in CAT II 600V installations.



MS8221A

Pocket size digital multimeter

- AC / DC current measurement max 10A.
- DC 1000VDC voltage measurement.
- 750VAC AC voltage measurement.
- Resistance measurement.
- Continuity test.
- Hold function.



M266C

Clamp meter

- 3½ digit LCD, with automatic polarity indication
- Dual-slope integration A-D converter system.
- CAT II 600V installation category.
- Jaw opening 50mm.
- AC 20/200/600 / 1000A current measurement.
- AC 200 / 600V voltage measurement.
- DC voltage measurement 0.2 / 2 / 20 / 200 / 600V.
- Resistance measurement.
- Temperature measurement max. 750°C.

VA503

Pen R/C meter for SMD

- measurement of resistance 400..40M Ohm
- capacity measurement 4nF..100µF
- diode test
- measurement of relative values



VA8010

Temperature /humidity and dew point meter

- 4-digit LCD display;
- °C, °F, % RH (relative humidity); td (dew point temperature);
- Resolution: 0.1°C; 0.1 °F; 0.1% RH;
- Range:
 - -10 ~ +50 °C, +14~ +122°F;
 - 0 ~ +100% relative humidity;
- Accuracy: ± 1.0 °C; ± 1.8 °F; ± 3% RH (5 ~ 95% RH);
- Sampling rate: 1/s;
- Automatic power off: about 20 minutes;
- Protective case;
- Large, easy to read LCD display.



VA8051

Luxmeter with sensor rotation

- 6 digits LCD Display
- Parameters: Lux (lm/m²), foot candle (lm/ft²)
- Resolution: 1 Lux (0...30000 Lux); 0.1 ftc(0...2788.0 ftc);
- Range: 0...30000 Lux, 0...2788.0 ftc
- Accuracy: ±(4% +50 digits) to reference
- Sample rate: 2 time /sec
- Auto power off: about 20 minutes



VA8090

Infrared temperature and thermocouple meter

- 4 digits LCD Display;
- Resolution:
 - 0.1 °C / 0.1 °F
 - 1 °C / 1 °F (thermocouple above 1000 °C)
- Range:
 - infrared: -50 ~ 300 °C (-58°F ~ 572 °F)
 - thermocouple: -200 ~ 1300 °C (-328 °F ~ 2372 °F)
- Accuracy:
 - infrared:
 - -50 ~ -20 °C / ± 5 °C / 9 °F
 - -20 ~ 300 °C / ± (1.5% odczyt + 2 °C / 4 °F)
 - thermocouple: -200 ~ -100 °C / ± (0.2% odczytu + 1 °C / 2 °F)
 - -100 ~ 1300 °C / ± (0.1% reading + 0.7 °C / 1.4 °F)
- Emissivity: 0.95
- Field of view: 2:1
- Laser power: Less than 1 mW
- Response time: 0.5 second
- Auto power off: 25 seconds (infrared) or 20 minutes (thermocouple)
- Low battery indicat



VA8060

Dual ways thermocouple meter

- 4 digits LCD Display
- Resolution:
 - 0.1 °C / 0.1 °F (below 1000 °C)
 - 1 °C / 1 °F (above 1000 °C)
- Range:
 - K - type: -200 °C ~ 1300 °C (-328 °F ~ 2372 °F)
 - J - type: -200 °C ~ 1200 °C (-328 °F ~ 2192 °F)
- Accuracy:
 - (-200 ~ -100 °C) ± (0.2% reading + 1 °C)
 - (-100 ~ 1300 °C) ± (0.1% reading + 0.7 °C)
 - (-328 ~ -148 °F) ± (0.2% reading + 2)
 - (-148 ~ 2372 °F) ± (0.1% reading + 1.4)
- Sample rate: 1 time /sec
- Auto power off: about 20 minutes
- Low battery indicator



VA90B **NEW**

Digital multimeter

- Base accuracy 0.2%
- IP67
- AC/DC Voltage measurement 0..1000V,
- AC/DC Current measurement μ A/mA/10 A,
- Resistance measurement 0 ... 60 M Ω ,
- Capacitance measurement 0 ... 60 mF,
- Frequency measurement, TTL
- Diode test
- Temperature measurement -200...1000°C,
- Auto Scan (SMART), REL, Duty
- Automatic measuring range selection
- HOLD function



VA28B **NEW**

Digital multimeter

- CAT III 600V
- TRMS
- AC/DC Voltage measurement 400mV...400 V,
- AC/DC Current measurement 40mA ... 10 A,
- Resistance measurement 400m Ω ... 40 M Ω ,
- Capacitance measurement 4 nF...4 mF,
- Frequency measurement
- Temperature measurement -200...1200°C,
- Auto Scan function (SMART)
- HOLD function
- Continuity test and Diode test
- Dimensions: 130 x 62 x 27 mm.



VA333 **NEW**

Clamp meter

- The diameter of measured cable 32 mm
- AC/DC Current measurement 400A,
- AC/DC Voltage up to 600V AC/DC,
- Resistance measurement 400m Ω ... 40 M Ω
- Capacitance measurement 50 nF... 100uF
- Frequency measurement 5..100kHz
- Continuity test and Diode test
- Hold,REL functions

MV PROTECTION RELAY

DIGITAL PROTECTION, AUTOMATION, MEASUREMENTS, CONTROL,
RECORDING AND COMMUNICATION

NEW



NEW



NEW



	extCZIP®-PRO	extCZIP®-2R PRO	extCZIP®-PV PRO	
Description	Digital protection relay for MV switchgears with additional inputs and outputs and communication ports	Automatic transfer switch (ATS) for MV switchgears	Integrated MV/LV protection and control relay for EPV switchgears and other renewable energy sources	
External dimensions : - flush-mounted version - wall-mounted version		283 x 190 x 153.5 mm 283 x 190 x 235 mm		
Weight		6 kg		
Protection rating		IP50		
Ambient temperature		-10...+55°C		
Storage temperature		-20°C ... +70°C		
Display		LCD TFT 7", 800x480, with colour touch panel		
Programmable diodes		14 programmable LEDs		
Programmable logics		Yes (40 logics line)		
Binary inputs		28 or 56		
Binary outputs		20 or 40		
Error log		Yes		
Event log		Yes		
Communications ports		USB, 2 x RS-485, Ethernet 10/100, BASE-TX, fibre optic (option), CAN-BUS/RS-485(option)	USB, 2 x RS-485, Ethernet 10/100, BASE-TX, fibre optic (option)	
Protocols		DNP 3.0, IEC 60870-5-103 and 104, IEC 61850, Modbus ASCII/RTU, PPM2 protocol on CAN-BUS/RS-485 port	DNP 3.0, IEC 60870-5-103 and IEC 60870-5-104, IEC 61850, Modbus ASCII/RTU	
POWER				
Rated supply voltage		24 V DC, 110 - 230 V AC/DC		
Power consumption		< 20 W		
PHASE CURRENT INPUT CIRCUITS				
Rated current I_n		5 A or 1 A		
Measurement range		0...192 A		
Measurement range	0.35 A - 50 A	<192 A < 10%	< 1.5%	< 10%
Rated frequency f_n		50 Hz		
Power consumption at $I=I_n$		< 0.5 VA		
PHASE VOLTAGE INPUT CIRCUITS				
Rated voltage U_n		100 V		
Measurement range		0...130 V		
Measurement error in measurement range		< 1.5%		
Rated frequency f_n		50 Hz		
Power consumption at $U=U_n$		< 0.4 VA		
ZERO SEQUENCE CURRENT INPUT CIRCUITS				
Rated current I_{0n}		0.5 A		
Measurement range		0-5 A		
Measurement error	0.02 - 3.5 A		< 1.5%	
Rated frequency f_n		50 Hz		
Power consumption at $I=I_{0n}$		< 0.4 VA		

MV PROTECTION RELAY

DIGITAL PROTECTION, AUTOMATION, MEASUREMENTS, CONTROL, RECORDING AND COMMUNICATION

	extCZIP®-PRO	extCZIP®-2R PRO	extCZIP®-PV PRO
ENERGIZING INPUTS (ZERO SEQUENCE VOLTAGE INPUT CIRCUITS)			
Rated voltage U_{0n}	100 V		
Measurement range	0...130 V		
Measurement error in measurement range	< 1.5%		
Rated frequency f_n	50 Hz		
Power consumption at $U=U_{0n}$	< 0.4 VA		
BINARY INPUTS			
Rated input voltage	24 V	220 V	
Input voltage range	17...32 V	88...253 V	
Current consumption	< 0.25 mA	< 3 mA	
BINARY OUTPUTS			
Rated voltage	220 V	24 V	
Continuous current-carrying capacity	5 A		
Inductive circuit opening • 220 V DC, L/R = 40 ms • 220 V AC, cos ϕ = 0.4	0.1 A 2 A		
POWER OUTPUT RELAY			
Rated voltage	220 V	24 V	
Continuous current-carrying capacity	8 A		
Inductive circuit opening: 220 V DC, L/R = 40 ms	1,2 A/300 cycles		
Time - switching of impulse	min 0.1 s		
Time - switching on impulse	min 0.1 s		
Software	CZIP-Set		
Intended use	Preconfigured settings and configurations including protections, measurements, control, recording and communication for all types of MV switchgear bay in the same housing: L feeder bay E feeder bay with local power station (including wind farm) Z incoming bay T MV side of the 110 kV/MV transformer C capacitor bay K grounding transformer in compensated network P grounding transformer in network with neutral earthing resistor X grounding transformer in network with choke/resistor parallel system U voltage measurement bay S bus coupler bay H 110 kV side of the 110 kV MV transformer	2R automatic transfer switch (ATS) without recovery cycles 2R1T automatic transfer switch (ATS) without recovery cycles with one power transformer 2R mini automatic transfer switch (ATS) recovery cycles and two incoming lines 2R3H automatic transfer switch (ATS) with recovery cycles and three incoming lines	PV service line MV/LV protection for PV farms
Unique protections and functionality	Under-impedance protection against phase-to-phase short-circuits. Sensitive, adaptive protection for high resistance earth fault (up to 8 k Ω). Selective earth fault protection for grounding transformer bays.	-	Under-impedance protection against phase-to-phase short-circuits.



► extCZIP-PRO



► extCZIP-2R-PRO



► extCZIP-PV-PRO

SMP RADIATION PORTAL MONITORS

DETECTION GAMMA AND/OR NEUTRON RADIATION



Radiation Portal Monitor (SMP) of Lumel S.A. are designed to detect radiation from gamma and/or neutron emitters contained in objects, containers, or vehicles, or carried by a pedestrian. SMP monitors may be equipped with one or several detection blocks and an operator panel with a touch screen and a printer.

Stationary Radiation Monitor Systems manufactured by Lumel S.A. are designed for three different areas:

- ▶ scrapyards, metalworks,
- ▶ incinerators, landfills,
- ▶ control points at border crossing points in airports, seaports, road border crossing, railway border crossing.

GAMMA- NEUTRON RADIATION PORTAL MONITORS



GAMMA RADIATION PORTAL MONITORS



Features:

- ▶ automatic radiometric control without interference on the traffic,
- ▶ high sensitivity,
- ▶ generation of reports and alarm signals,
- ▶ speed control,
- ▶ interactive control panel with a 8,3" touch screen,
- ▶ bi-directional communication which provides:
 - ▶ remote control of the smp,
 - ▶ remote change of selected parameter settings,
- ▶ operation in the dedicated Remote Management System SMP-Studio,
- ▶ video recording (supervised by the SMP-Studio),
- ▶ reliability,
- ▶ user-friendly.

SMP RADIATION PORTAL MONITORS

DETECTION GAMMA AND/OR NEUTRON RADIATION


	GAMMA RADIATION PORTAL MONITORS		GAMMA- NEUTRON RADIATION PORTAL MONITORS					
	SMP-4/100	SMP-2/50	SMP-M11	SMP-M22	SMP-11	SMP-22	SMP-44	
Application	<ul style="list-style-type: none"> scrap metal recycling facilities steel mills 	<ul style="list-style-type: none"> landfills incineration plants 	Control points at border crossing points in airports, seaports, road border crossing, railway border crossing.					
Control zone [width/height]	6 m / 4 m permissible (4,5 m / 4 m optimal)		1.5 m / 2 m	3 m / 2 m	1.5 m / 2 m	3 m / 2 m	6 m / 2 m	6 m / 4 m
Speed	8 km / h permissible (5 km / h optimal)		5 km/h			5 km / h	8 km / h	8 km/h
Controlled object	trucks, containers, rail vehicles	trucks, containers	pedestrians with hand luggage (indoor use)	pedestrians, luggage, conveyor belt, trolleys, –outdoor use	vehicles, luggage, pedestrians – outdoor use		trucks, buses, rail vehicles	


SMP STUDIO | REMOTE SUPERVISION SYSTEM

Remote Supervision System SMP-Studio performs the function of visualization, collection and distribution of operation data detected by Radiation Portal Monitors installed on one or many locations.

Remote visualization of the status of SMP RPM's / Recording alarm and emergency data / Recording changes in SMP device settings / The image preview of supervisory zone from video cameras / Saving image of supervisory zone

from the course of alarm recorded by video cameras / Compilation and printing information about operation mode and registered events / Automatic backup of computer database / Automatic synchronization of the clock of SMP device: / Supervision of up to 32 supervisory zones / Communication with supervisor SMP by LAN or WAN networks

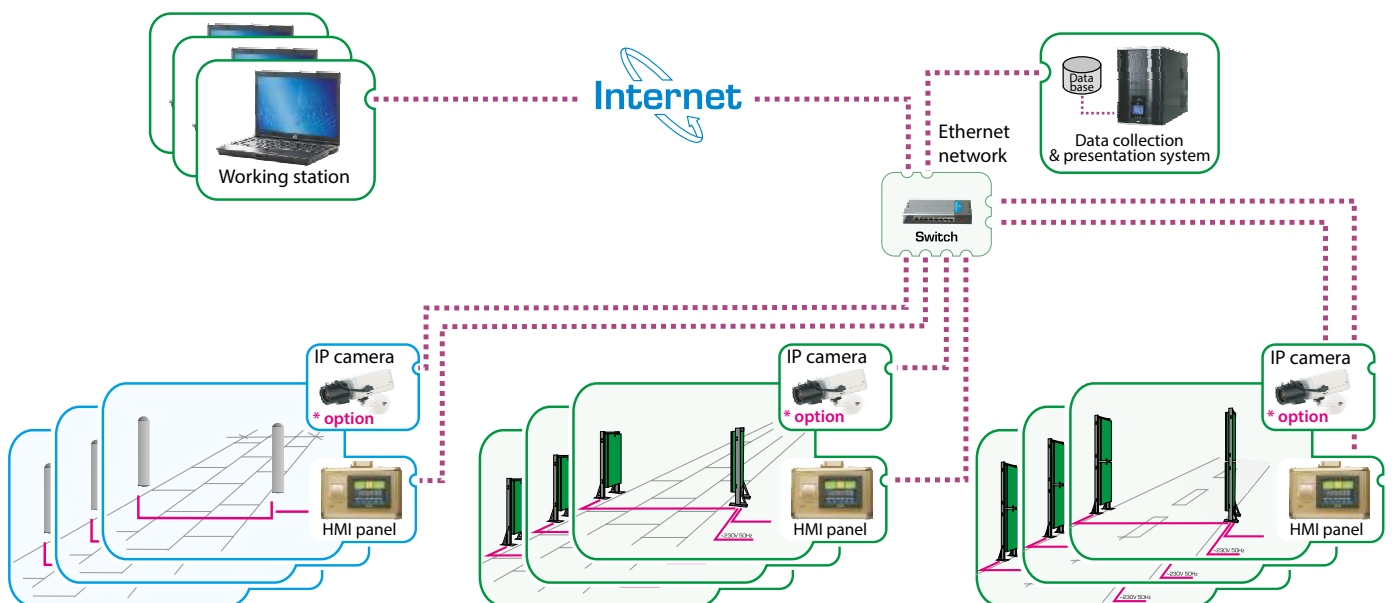

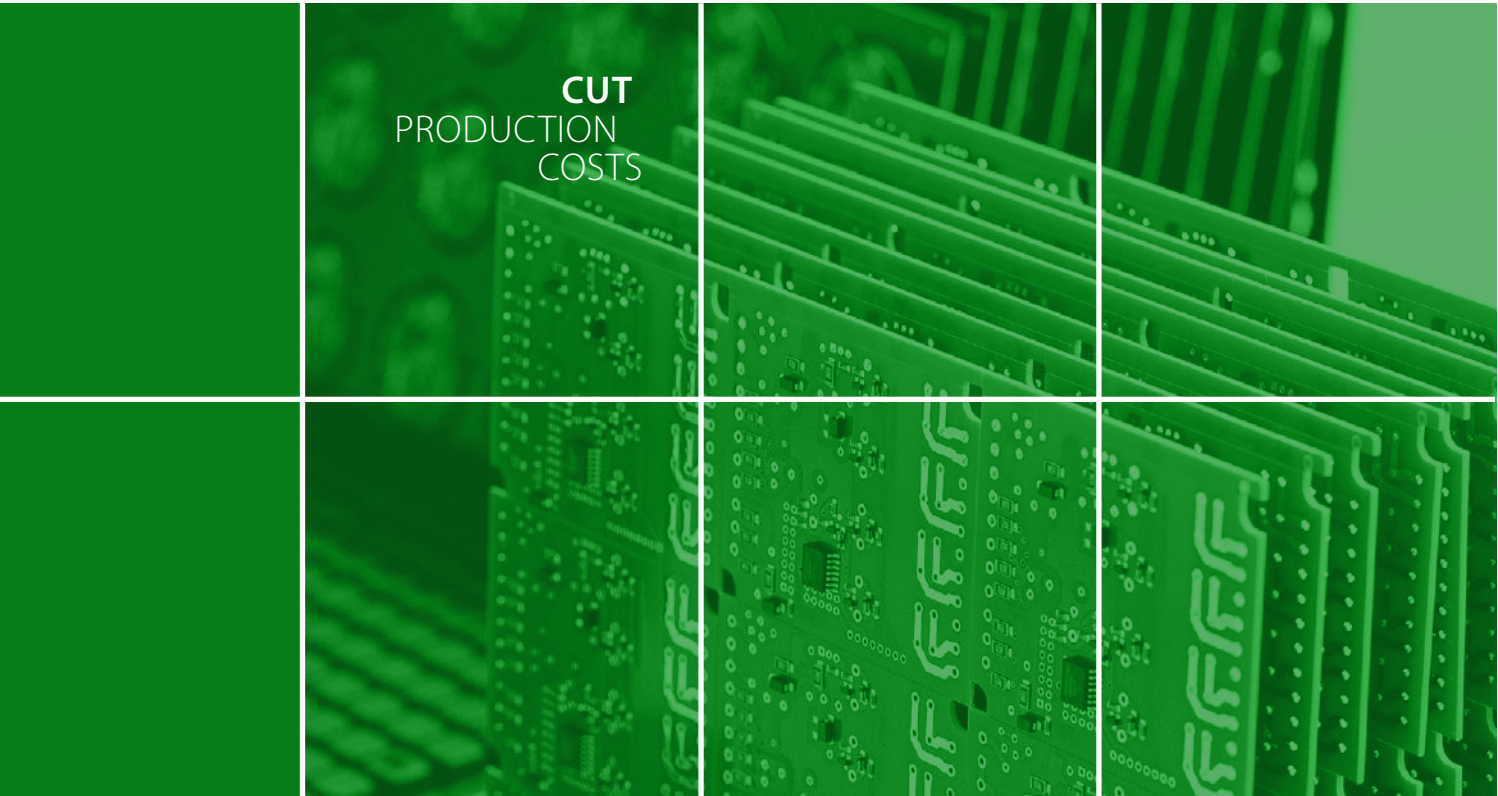

For close to 70 years, LUMEL is well-known in the international market for the production of highest quality of electronic measuring devices. Precision has been the instilled in the roots of LUMEL, our proficient employees and cutting edge technologies permit us to offer:

- ▶ **EMS** - Every year forward, we receive numerous orders for assembly of electronic subassemblies, determining us to invest in up-to-date and high-duty lines for SMT assembling of electronic elements, making us capable of producing prototypes, small, medium and large sized PCBs.
- ▶ **OEM / ODM** - Conceptualizing – Designing – Development – Production, in the scope of housing, electronics, mechanics, software. All Under one roof. We offer sub-contracting services and industrial co-operation.

Knowing that your electronic products will be produced by a competent manufacturer, you can be free from responsibilities of manufacturing and can lay your focus on other sectors of your business such as marketing and sales while the goods are being prepared.

RESEARCH & DEVELOPMENT LABORATORY SERVICES

Lumel laboratory is where your products go through a detailed series of tests like:

- ▶ Environmental,
- ▶ EMC,
- ▶ Vibration,
- ▶ Functional test.



SURFACE MOUNT TECHNOLOGY (SMT) SERVICES

- ▶ One-sided and double-sided assembling of SMD elements in the technology of reflow soldering, in accordance with European Directive for RoHS.
- ▶ Assembly of thread elements by flow soldering,
- ▶ Assembly can be carried out on the base of own or committed elements.

The first assembly line is composed of:

- ▶ Silk screen printer JUKI G-TITAN
- ▶ Two automatic Spick & Place JUKI RS-1R machines
- ▶ 10- zones reflow soldering oven JUKI RS 1000
- ▶ The whole line consists of JUKI handling system, loader, unloader, two conveyors of the circuit boards.

The second assembly line is composed of:

- ▶ Silks creen printer JUKI K1760,
- ▶ Placement machine JUKI KE-2060,
- ▶ Reflow oven ERSA HOTFLOW 2/14,
- ▶ Magazine loader and line unloader – JOT,
- ▶ Conveyors and in-line workstation – JOT.



The third assembly line is composed of:

- ▶ Silk screen printer ERSA
- ▶ Two automatic machines JUKI (flexible KE-3020VA and high-speed chip shooter: FX-3RA).
- ▶ 7- zones reflow soldering oven ERSA HOTFLOW 3/14E.
- ▶ The whole line consists of handling system, loader, conveyors and unloader of the circuit boards manufactured by ASYS - Germany.



Additionally our machine park is equipped with:

- ▶ Tester A01 - PowerSpecter GTAz 350,
- ▶ Tester A01 - PowerSpecter GTAz 350CE Dolphin,
- ▶ Optical control stands,
- ▶ Flying Probe Takaya tester.

The entire assembly process is carried out under the strict supervision of a team of technologists and is in accordance with the European directive IPC-A-610G.

OUR SMT LINES CAN MOUNT UP TO 167,000 ELECTRONIC COMPONENTS PER HOUR.

PCB size **max. 410x360mm / min. 50x30mm / Optimum: 200x300mm /**

The number of layers: **36**

Components up to size **0201 – 74 x 74/50 x 150 mm**

Laminate thickness: Maximum: 5.0mm Minimum: 0.5mm	Materials: FR4, CEM, Aluminium, flexibel	Copper plating: HAL RoHS, HAL Pb, OSP, chemical or galvanic gold plating, silver plating
Copper thickness Material [µm]: 12 / 18 / 35 / 70 / 105	Final thickness after metallization [µm]: 30 / 35 / 60 / 95 / 130	Available soldermask colors: green (standard), red, black, white, blue, other colors on customer's request
Minimum path width: Value [mm]: 0.1 / Recommended [mm]: 0.2	The minimum hole diameter: Value [mm]: 0.1 / Recommended [mm]: 0.3	The minimum distance copper – copper Value [mm]: 0.1 / Recommended [mm]: 0.2
Additionally: carbon paste, UL peelable mask, marking		

THROUGH HOLE TECHNOLOGY (THT) SERVICES



As part of the offered THT assembly service, we implement the following steps:

- ▶ Preparation of elements, automatic processing - cutting and bending.
- ▶ Placement of elements - manual assembly and soldering.
- ▶ Assembly of elements on a solder wave.
- ▶ Cable processing.



In addition, we also provide services in the field of:

- ▶ Programming.
- ▶ Coating finished products with varnishes or protective compounds.
- ▶ Performing functional tests.
- ▶ Final assembly of the product.
- ▶ Calibration of the devices.

Machine park:

- ▶ All stations are equipped with ESD protection measures in accordance with EN 61340 5-1 and 5-2.
- ▶ Solder wave - Nova Star 12D.
- ▶ Washing and drying station - Pbt Super Swash.

ADDITIONAL SERVICES



DESIGNING:

When customers come to us with ideas, we offer them our team of designers and programmers who prepare model, prototypes and perform necessary tests required which confirm that the product fulfills all the CE standards.

ADDITIONAL TESTS:

Our products are tailor made keeping our customers demand in consideration, therefore we also offer different sample size and medium of test for a minimum cost in case the customers want customized test samples to comply to the needs of their products.

PROTECTING COATS:

With high quality products, programmable selective coating on any part of the PCB with a protective varnish or resin is performed, according to the customers demand.

LABELING:

After your product is mounted, we can place your logo and the details you require.

PACKAGE DESIGNING:

Every PCB and electronic device manufactured in our facility is precisely protected and we pack them in accordance to the customers guidelines. We make sure that the packaging is done to the best of our abilities so that the product is safe and sound

SERVICING:

Servicing of any parts (assembly and disassembly) is offered as an extra service by our team.

CALIBRATION & ATTESTATION

CHECK YOUR INSTRUMENTS
AT OUR LABORATORY

Checking should be carried out regularly in all places where precise measurements significantly influence human life and health.

Our services for you

If you want to have a **GUARANTEE**, that your instruments work properly - **USE OUR LABORATORY!**

We provide services related to calibration of analogue and digital devices, including:

- ▶ 3-phase power network meters,
- ▶ multi-channel controllers and recorders,
- ▶ ammeters, voltmeters, wattmeters,
- ▶ multimeters,
- ▶ shunts and current transformers,
- ▶ temperature meters and sensors (thermoresistive, semiconductor, thermocouples),
- ▶ humidity meters and transducers.

The laboratory also performs tests of devices in the scope of:

- ▶ electromagnetic compatibility,
 - electromagnetic noise immunity according to EN 61000-6-2,
 - emission of electromagnetic interference according to EN 61000-6-4,
 - safety (including safety according to EN 61010-1)
- ▶ ambient and environmental conditions,
- ▶ vibrations and impacts (among others transport conditions),
- ▶ measurement accuracy.

We guarantee competitive prices and delivery dates!

We are looking forward to doing business with you and working together!

CONTACT:

address:
LUMEL S.A.
ul. Stubińska 4
65-127 Zielona Góra, Poland
e-mail: laboratorium@lumel.com.pl



Electrical quantities



Temperature



Temperature and relative air humidity



LUMEL has been known, since 1953, all over the world, as a manufacturer of top quality industrial automation devices. In 2020, international reports listed Lumel as one of the world's leaders in the production of electrical quantity transducers, network parameter analyzers and analog meters.

Lumel offers consists of product categories, such as:
for low voltage:

- ▶ Network parameter meters and analyzers,
- ▶ Electrical and non-electrical quantity transducers,
- ▶ Digital meters,
- ▶ Recorders and data loggers,
- ▶ Controllers,
- ▶ Analog meters,
- ▶ Current transformers,
- ▶ Shunts.

Depending on the needs of the customer, the automation products and systems our offer relay on various data communication protocols (MODBUS, ETHERNET, PROFINET, BACNET or MQTT).

for medium voltage :

- ▶ Protection relays.

Apart from the products, Lumel specializes in complex systems used for:

- ▶ monitoring and optimizing the cost of electricity and other utilities (water, gas, compressed air)
- ▶ monitoring environmental parameters: temperature, humidity, light intensity, CO₂, volatile gases
- ▶ solar energy.

In addition to its manufacturing activity, Lumel offers also:

- ▶ OEM services in the scope of housing designing, electronics, mechanics, hardware and software. All under one roof.
- ▶ EMS services.
- ▶ ODM services.

We are a member of an international capital group which consists of the following companies: LUMEL S.A., LUMEL ALUCAST Sp. z o.o., Rishabh Instruments Pvt. Ltd., Sifam Tinsley US, Sifam Tinsley UK.

ЭНЕРГОМЕТРИКА
www.energometrika.ru